



Ref. Certif. No.

JPTUV-048586

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST
CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEME

SYSTEME CEI D'ACCEPTATION MUTUELLE DE
CERTIFICATS D'ESSAIS DES EQUIPEMENTS
ELECTRIQUES (IECEE) METHODE OC

CB TEST CERTIFICATE CERTIFICAT D'ESSAI OC

Product
Produit

LCD Monitor

Name and address of the applicant
Nom et adresse du demandeur

Top Victory Electronics (Taiwan) Co., Ltd.
10F., No. 230, Liancheng Rd.
Zhonghe Dist., New Taipei City, 23553 Taiwan

Name and address of the manufacturer
Nom et adresse du fabricant

NEC Display Solutions, Ltd.
4-28, Mita 1-chome, Minato-ku
Tokyo, 108-0073 JAPAN

Name and address of the factory
Nom et adresse de l'usine

See additional page(s)

Rating and principal characteristics
Valeurs nominales et caractéristiques principales

AC 100-240V; 50/60Hz; 1.00-0.50A; Class I

Trade mark (if any)
Marque de fabrique (si elle existe)

NEC

Model/type Ref.
Ref. de type

L292VK, EA294WMI(C), EA294WMI-BK(C)
MultiSync EA294WMI, MultiSync EA294WMI-BK

Additional information (if necessary)
Information complémentaire (si nécessaire)

For model differences, refer to the test report.

A sample of the product was tested and found
to be in conformity with
Un échantillon de ce produit a été essayé et a été
considéré conforme à la

IEC 60950-1:2005+A1
National differences see test report

As shown in the Test Report Ref. No. which forms part
of this Certificate
Comme indiqué dans le Rapport d'essais numéro de
référence qui constitue une partie de ce Certificat

11030936 001

This CB Test Certificate is issued by the National Certification Body
Ce Certificat d'essai OC est établi par l'Organisme National de Certification



TÜV Rheinland Japan Ltd.
Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku
Yokohama 224-0021 Japan
Phone + 81 45 914-3888
Fax + 81 45 914-3354
Mail: info@jpn.tuv.com
Web: www.tuv.com

Date: 21.12.2012

Signature:


Jerry F. R. Yang

1. TPV Technology (Beijing) Co., Ltd.
No. 10, Jiu Xian Qiao Rd.
Chao Yang District, Beijing 100016
P.R. China
2. Tatung Mexico S.A. de C.V.
Ave. Rosa Ma. Fuentes #7050
Complejo Industrial Fuentes
C.P. 32320, Cd. Juarez. Chih,
MEXICO
3. TPV Display Technology (Wuhan)
Co., Ltd.
Unique No. 11, Zhuankou Development
District of Economic Technological
Development Zone, Wuhan City 430056, P.R. China
4. TPV Electronics (Fujian) Co., Ltd.
Yuan Hong Rd., Shang-Zheng Hong-Lu
Fuqing City Fujian 350301
P.R. China
5. Envision Industry of Electronic
Products Ltd.
895, Joao Marcos Pozzetti Street,
Industrial District II,
69.075-215 Manaus, Am, Brazil
6. Envision Industry of Electronic
Products Ltd.
Rodovia Anhanguera S/N-KM 49
13.205-700 Tijuco Preto-Jundiai-SP-
Brazil
7. TPV Displays Polska Sp. z o.o.
ul. Zlotego Smoka 9
66-400 Gorzów Wlkp.
Poland
8. L&T Display Technology (Fujian) Ltd.
Optoelectronic Park, Rongqiao
Economic and Technological
Development Zone
Fuqing, Fujian 350301, P.R. China
9. TPV Display Technology (Beihai)
Co., Ltd.
China Electronic Beihai Industry
Park, Northeast of the Crossing
Between Taiwan Road and Jilin Road, Beihai City, Guangxi, P.R. China

Additional information (if necessary)
Information complémentaire (si nécessaire)

Report Ref. No.: 11030936 001

Date: 21.12.2012

Signature:


Jerry F. R. Yang

10. Envision Industry of Electronic
Products Ltd.
Av Torquato Tapajós 7503,
Galpão : II Bloco: B-Condomínio
de Galpões-Tarumã-Manaus, AM, Brazil

11. TPV Technology (Qingdao)
Co., Ltd.
No.99 Huoju Road, High-tech Industrial
Development Zone
Qingdao City, Shandong Province, P.R. China


Additional information (if necessary)
Information complémentaire (si nécessaire)

Report Ref. No.: 11030936 001

Date: 21.12.2012

Signature:


Jerry F. R. Yang



Test Report issued under the responsibility of:



TEST REPORT	
IEC 60950-1	
Information technology equipment – Safety –	
Part 1: General requirements	
Report Number.....	11030936 001
Date of issue.....	20-Dec.-2012
Total number of pages.....	71
CB Testing Laboratory.....	TÜV Rheinland Taiwan Ltd., Taichung Laboratory.
Address.....	No. 9, Ln. 36, Sec. 3, Minsheng Rd., Daya District, Taichung City 428, Taiwan
Applicant's name.....	Top Victory Electronics (Taiwan) Co., Ltd.
Address.....	10F., No. 230, Liancheng Rd., Zhonghe Dist., New Taipei City, 23553 Taiwan
Manufacturer's name.....	NEC Display Solutions, Ltd.
Address.....	4-28, Mita 1-chome, Minato-Ku, Tokyo, 108-0073 JAPAN
Test specification:	
Standard	IEC 60950-1:2005 (Second Edition) + Am 1:2009
Test procedure.....	CB Scheme
Non-standard test method.....	N/A
Test Report Form No.....	IEC60950_1C
Test Report Form(s) Originator	SGS Fimko Ltd
Master TRF	Dated 2012-08
Copyright © 2012 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
Test item description.....	LCD Monitor
Trade Mark	NEC
Manufacturer.....	See above manufacturer
Model/Type reference.....	L292VK, EA294WMi(C), EA294WMi-BK(C), MultiSync EA294WMi, MultiSync EA294WMi-BK
Ratings.....	100-240Vac, 50/60Hz, 1.00-0.50 A

Testing procedure and testing location:		
☒	CB Testing Laboratory:	Refer to page 1
Testing location/ address		Refer to page 1
☐	Associated CB Laboratory:	
Testing location/ address		
Tested by (name + signature).....:		Sean Usueh
Approved by (name + signature)		Dennis Chiu
☐	Testing procedure: TMP	
Testing location/ address		
Tested by (name + signature).....:		
Approved by (name + signature)		
☐	Testing procedure: WMT	
Testing location/ address		
Tested by (name + signature).....:		
Witnessed by (name + signature).....:		
Approved by (name + signature)		
☐	Testing procedure: SMT	
Testing location/ address		
Tested by (name + signature).....:		
Approved by (name + signature)		
Supervised by (name + signature).....:		
☐	Testing procedure: RMT	
Testing location/ address		
Tested by (name + signature).....:		
Approved by (name + signature)		
Supervised by (name + signature).....:		

List of Attachments (including a total number of pages in each attachment):

- Photo documentation
- Measurement Section
- National Differences

Total number of pages in each attachment is indicated in individual attachment.

Summary of testing:**Tests performed (name of test and test clause):**

All applicable tests as described in Test Case and Measurement Sections were performed.

- The manufacturer specified the maximum ambient temperature as +40°C.
- The Highest load condition for this equipment is to operate below conditions:
 - 1) maximum backlight, brightness and contrast of LED backlight
 - 2) the volume was adjusted to maximum non-clipped sinusoidal wave output power
 - 3) 0.5A each for USB 2.0 portsx3
 - 4) 0.9A for MHL port (HDMI port)
- The product is to be operated at 5000 m above sea level, the minimum clearances were multiplied by the factor given in Table A.2 of IEC 60664-1: 1.48
- Test samples are pre-production samples without serial numbers.
- Tested on model L292VK to represent other models if no further specification.
- See following sub-clauses and appended tables for detailed test results.

Testing location:

All tests as described in Test Case and Measurement Sections were performed at the laboratory described on page 2.

Summary of compliance with National Differences

List of countries addressed:

EU Group Differences, EU Special National Conditions, CA, DE, FI, IL, KR, US.

Explanation of used codes: CA = Canada, DE = Germany, FI = Finland, IL = Israel, KR = Republic of Korea, US = United States of America.

☒ The product fulfils the requirements of EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011

For IEC 60950-1:2005 / EN 60950-1:2006+A11:2009 (per client request):

AU, CN

For IEC 60950-1:2001 / EN 60950-1:2001+A11:2004 (per client request):

(All CB members countries listed in CB Bulletin No. 112A, dated December 2006)

AR, AT, BE, CN, CZ, FR, GR, HU, IN, IT, JP, KE, MY, NL, PL, SG, SI, SK.

For IEC 60950:1999 (3rd Edition) + Corr. Jan. 2000 (per client request):

BR, IE, PT, RU, TR, UA, ZA.

Explanation of used codes: AR=Argentina, AT=Austria, AU=Australia, BE=Belgium, BR=Brazil, CN=China, CZ=Czech Republic, FR=France, GR=Greece, HU=Hungary, IE=Ireland, IN=India, IT=Italy, JP=Japan, KE=Kenya, MY=Malaysia, NL=The Netherlands, PL=Poland, PT=Portugal, RU=Russian Federation, SG=Singapore, SI=Slovenia, SK=Slovakia, TR=Turkey, UA=Ukraine, ZA=South Africa.

For National Differences see corresponding Attachment.

Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

(Additional requirements for markings. See 1.7 NOTE)

NEC MultiSync EA294WMi LCD MONITOR VOLTS 定格電圧 :100-240V ~, AMPERES 定格電流 :1.00-0.50A (1.3A for Mexico), FREQUENCY 定格周波数 :50/60Hz (Model: L292VK)

CAUTION: TO PREVENT ELECTRIC SHOCK, DO NOT REMOVE THE ENCLOSURE. NO USER-SERVICEABLE PARTS INSIDE.

ATTENTION: AFIN DE PREVENIR DE TOUT CHOC ELECTRIQUES, NE PAS OUVRIR CE BOITIER. AUCUNE PIECE INTERNE NE PEUT-ETRE CHANGEE PAR L'UTILISATEUR.

ACHTUNG: ZUR TRENNUNG VOM NETZ IST DER NETZSTECKER AUS DER STECKDOSE ZU ZIEHEN. GERÄT NICHT ÖFFNEN, ES SIND KEINE DURCH DEN BENUTZER AUSWECHSELBAREN TEILE IM GERÄT VORHANDEN.

PRECAUCION: PARA PREVENIR DESCARGA ELÉCTRICA, NO quite el recinto. Ningunas piezas del usuario servicable adentro.

VAROITUS: LAITE ON LITETTÄVÄ SUOJAMAADONTUSKOSKETTIMILLA VARUSTETTUUN PISTORASIAAN.

VARNING: APPARATEN SKALL ANSLUTAS TILL JORDAT UTTAG.

ADVARSEL: APPARATET MÅ TILKOPLES JORDET STIKKONTAKT.

NEC Display Solutions, Ltd. 4-28, Mita 1-chome, Minato-ku, Tokyo, Japan

THIS CLASS B DIGITAL APPARATUS MEETS ALL REQUIREMENTS OF THE CANADIAN INTERFERENCE-CAUSING EQUIPMENT REGULATIONS.
CET APPAREIL NUMÉRIQUE DE LA CLASSE B RESPECTE TOUTES LES EXIGENCES DU RÈGLEMENT SUR LE MATÉRIEL BROUILLER DU CANADA.

For Japan only
警告
高圧注意
サービスマン以外の方は分解しないでください。内部には高電圧部分があり、万一さわると危険です。
感電注意
電源コードのアースリード線は必ず接地ください。故障のときに感電の原因になります。

FC CE PG C UL US E130889 LCD MONITOR 1481 N56

ISO 9241-307 TÜV Rheinland PS E HDMI HIGH-DEFINITION MULTIMEDIA INTERFACE

Fabriquée en Chine
Fabricado en China
MADE IN CHINA

XXXXXXXX XXXXXXX-XXX-XX

NEC MultiSync EA294WMi LCD MONITOR VOLTS 定格電圧 :100-240V ~, AMPERES 定格電流 :1.00-0.50A (1.3A for Mexico), FREQUENCY 定格周波数 :50/60Hz (Model: L292VK)

CAUTION: TO PREVENT ELECTRIC SHOCK, DO NOT REMOVE THE ENCLOSURE. NO USER-SERVICEABLE PARTS INSIDE.

ATTENTION: AFIN DE PREVENIR DE TOUT CHOC ELECTRIQUES, NE PAS OUVRIR CE BOITIER. AUCUNE PIECE INTERNE NE PEUT-ETRE CHANGEE PAR L'UTILISATEUR.

ACHTUNG: ZUR TRENNUNG VOM NETZ IST DER NETZSTECKER AUS DER STECKDOSE ZU ZIEHEN. GERÄT NICHT ÖFFNEN, ES SIND KEINE DURCH DEN BENUTZER AUSWECHSELBAREN TEILE IM GERÄT VORHANDEN.

PRECAUCION: PARA PREVENIR DESCARGA ELÉCTRICA, NO quite el recinto. Ningunas piezas del usuario servicable adentro.

VAROITUS: LAITE ON LITETTÄVÄ SUOJAMAADONTUSKOSKETTIMILLA VARUSTETTUUN PISTORASIAAN.

VARNING: APPARATEN SKALL ANSLUTAS TILL JORDAT UTTAG.

ADVARSEL: APPARATET MÅ TILKOPLES JORDET STIKKONTAKT.

NEC Display Solutions, Ltd. 4-28, Mita 1-chome, Minato-ku, Tokyo, Japan

THIS CLASS B DIGITAL APPARATUS MEETS ALL REQUIREMENTS OF THE CANADIAN INTERFERENCE-CAUSING EQUIPMENT REGULATIONS.
CET APPAREIL NUMÉRIQUE DE LA CLASSE B RESPECTE TOUTES LES EXIGENCES DU RÈGLEMENT SUR LE MATÉRIEL BROUILLER DU CANADA.

For Japan only
警告
高圧注意
サービスマン以外の方は分解しないでください。内部には高電圧部分があり、万一さわると危険です。
感電注意
電源コードのアースリード線は必ず接地ください。故障のときに感電の原因になります。

FC CE PG C UL US E130889 LCD MONITOR 1481 N56

ISO 9241-307 TÜV Rheinland PS E HDMI HIGH-DEFINITION MULTIMEDIA INTERFACE

Fabriquée en Chine
Fabricado en China
MADE IN CHINA

XXXXXXXX XXXXXXX-XXX-XX

NEC MultiSync EA294WMi 液晶显示器 / LCD MONITOR

型号: EA294WMi(C)

VOLTS 输入电压: 100-240V~, AMPERES 电流: 1.00-0.50A, FREQUENCY 工作频率: 50/60Hz

注意: 本显示器内有高压, 非专业人员, 请勿自行打开后盖, 以免危险!

CAUTION: TO PREVENT ELECTRIC SHOCK, DO NOT REMOVE THE ENCLOSURE. NO USER-SERVICEABLE PARTS INSIDE.

NEC Display Solutions, Ltd. 日本国东京都港区三田一丁目4番28号

生产厂: 福建捷联电子有限公司
生产地址: 福建省福清市元洪路上郑

中国制造 / Made in China

XXXXXXXX XXXXXXX-XXX-XX

NEC MultiSync EA294WMi 液晶显示器 / LCD MONITOR

型号: EA294WMI-BK(C)

VOLTS 输入电压: 100-240V~, AMPERES 电流: 1.00-0.50A, FREQUENCY 工作频率: 50/60Hz

注意: 本显示器内有高压, 非专业人员, 请勿自行打开后盖, 以免危险!

CAUTION: TO PREVENT ELECTRIC SHOCK, DO NOT REMOVE THE ENCLOSURE. NO USER-SERVICEABLE PARTS INSIDE.

NEC Display Solutions, Ltd. 日本国东京都港区三田一丁目4番28号

生产厂: 福建捷联电子有限公司
生产地址: 福建省福清市元洪路上郑

中国制造 / Made in China

XXXXXXXX XXXXXXX-XXX-XX

Notes:

1. Representative labels provided above and see the cover page for model names.

Test item particulars:	
Equipment mobility.....:	☒ movable ☐ hand-held ☐ transportable ☐ stationary ☐ for building-in ☐ direct plug-in
Connection to the mains	☒ pluggable equipment ☒ type A ☐ type B ☐ permanent connection ☒ detachable power supply cord ☐ non-detachable power supply cord ☐ not directly connected to the mains
Operating condition.....:	☒ continuous ☐ rated operating / resting time:
Access location	☒ operator accessible ☐ restricted access location
Over voltage category (OVC)	☐ OVC I ☒ OVC II ☐ OVC III ☐ OVC IV ☐ other:
Mains supply tolerance (%) or absolute mains supply values	±10
Tested for IT power systems	☒ Yes ☐ No
IT testing, phase-phase voltage (V)	230 for Norway
Class of equipment	☒ Class I ☐ Class II ☐ Class III ☐ Not classified
Considered current rating of protective device as part of the building installation (A)	16 (20 for North America)
Pollution degree (PD)	☐ PD 1 ☒ PD 2 ☐ PD 3
IP protection class	IPX0
Altitude during operation (m)	Up to 5000
Altitude of test laboratory (m)	Less than 2000
Mass of equipment (kg)	Approx. 9.3 kg (include base : 2.94 kg)
Possible test case verdicts:	
- test case does not apply to the test object : N/A (or N)	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing:	
Date of receipt of test item	Dec., 2012
Date(s) of performance of tests	Dec., 2012
General remarks:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report. Throughout this report a ☐ comma / ☒ point is used as the decimal separator.	

Manufacturer's Declaration per sub-clause 6.2.5 of IEC60950-1:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:

- ☒ Yes
☐ Not applicable

When differences exist; they shall be identified in the General product information section.

- Name and address of factory (ies)** :
1. TPV Electronics (Fujian) Co., Ltd.
Yuan Hong Rd., Shang-Zheng Hong-Lu, Fuqing City Fujian 350301, P.R. China
 2. TPV Technology (Beijing) Co., Ltd.
No. 10, Jiu Xian Qiao Rd., Chao Yang District, Beijing 100016, P.R. China
 3. TPV Display Technology (Wuhan) Co., Ltd.
Unique No. 11, Zhuankou Development, District of Economic Technological Development Zone, Wuhan City 430056, P.R. China
 4. TPV Technology (Qingdao) Co., Ltd.
No.99 Huoju Road, High-tech Industrial, Development Zone Qingdao City, Shandong Province, P.R. China
 5. L&T Display Technology (Fujian) Ltd.
Optoelectronic Park, Rongqiao Economic and Technological, Development Zone, Fuqing, Fujian 350301, P.R. China
 6. Envision Industry of Electronic Products Ltd.
Rodovia Anhanguera S/N-KM 49, 13.205-700 Tijuco Preto-Jundiaí-SP-Brazil
 7. Envision Industry of Electronic Products Ltd.
895, Joao Marcos Pozzetti Street, Industrial District II, 69.075-215 Manaus, Am, Brazil
 8. TPV Displays Polska Sp. z o.o.
ul. Zlotego Smoka 9, 66-400 Gorzów Wlkp., Poland
 9. Envision Industry of Electronic Products Ltd.
Av Torquato Tapajós 7503, Galpão : II Bloco: B -Condomínio de Galpões-Tarumã-Manaus, AM, Brazil
 10. Tatung Mexico S.A. de. C.V.
Ave. Rosa Ma. Fuentes #7050 Complejo Industrial Fuentes, C.P. 32320, Cd. Juarez. Chih, MEXICO
 11. TPV Display Technology (Beihai) Co., Ltd.
China Electronic Beihai Industry Park, Northeast of the Crossing Between Taiwan Road and Jilin Road, Beihai City, Guangxi, P.R. China

General product information:

Model/Type reference:

Models L292VK, EA294WMi(C), EA294WMi-BK(C), MultiSync EA294WMi and MultiSync EA294WMi-BK are identical to each other except for type designation.

This equipment consists of the following critical components:

- Plastic enclosure
- Metal enclosure inside and fixed to chassis by screws
- LCD panel (LED backlight type)
- Two speakers
- Optional base with tilt (0 to 30°), swivel, height adjustment and pivot 90° (rotation function and left side will be bottom)
- Building-in type non-approved switching power supply (SPS) with inlet (SPS outputs: +5V/1.5A, +5V/0.5A, +6.3V/3A, +12V/0.5A, +16V/2A and all outputs complied with LPS)
- Inlet, PWB trace and metal enclosure/chassis act as protective bonding conductor
- Main board with 2 USB ports and USB control board with 2 USB ports

The suitable power supply cord will be provided and evaluated during national approval.

Engineering Considerations

- The following enclosures are provided:
 - Fire enclosure: Plastic enclosure and metal enclosure combination
 - Mechanical enclosure: Plastic enclosure
 - Electrical enclosure: Plastic enclosure
- The equipment shall be evaluated for sub-clause 2.6.3.4 additionally during CA/US approval.
- The wall mount function only evaluated VESA adaptor kit at back of equipment. And there is no consideration for fixing as stationary equipment provided or permits removal without tool by user. Basically, the equipment considered to be movable and allows the use of V-1 min. material for the outer plastic enclosure. However, the equipment has four screw holes for VESA adaptor kit assembly, which is compliant with VESA standard. VESA compatible wall mounting kit, 100 × 100 mm distance, four M4 size with 8.5 mm length screws to secure. Overall fixing of equipment should be evaluated for final assembly.

Additional Information

- The Label in Copy of marking plate is a draft of an artwork pending approval by National Certification Bodies and it shall not be affixed to products prior to such an approval.
- The speaker jack has also been tested and found in compliance with the requirements of EN 50332-2. Measured output power of the speaker jack: Right side: 76.8mV (100%) and 46.6mV (50%); Left side: 105mV (100%) and 33.7mV (50%).
- Special national conditions for J60950-1(H22):2010
Per client's request, supplement the special national conditions for J60950-1(H22):2010 and J3000 (H21):2009 to present test report. Described as following items:
 - a) Power cord set for Japanese market is added and AC plug adaptor is optional used and the equipment is consider as Class 0I or Class I equipment.
 - b) Considered further Japanese technical requirements J60950-1 (H22)
- Power cord set is replaced and AC plug adaptor is optional used for Japanese market. The equipment

is regarded to be Class 0I or Class I equipment. Unit also complies with touch current requirements for Class 0I equipment: < 1.0 mA.

Markings and Instructions

- Fuse Identification (See subclause 1.7.6): F901 T3.15AL/250VAC; F902 T4AL/250VAC
- $\perp$ (IEC 60417-5017) for the wiring terminal of protective bonding conductor. (See subclause 1.7.7.1)
- ⏻ (IEC 60417-5009) for the stand-by condition. (See subclause 1.7.8.3)

Definition of variable(s):

Variable:	Range of variable:	Content:
N/A		

Abbreviations used in the report:

- normal conditions	N.C.	- single fault conditions	S.F.C
- functional insulation	OP	- basic insulation	BI
- double insulation	DI	- supplementary insulation	SI
- between parts of opposite polarity	BOP	- reinforced insulation	RI

Indicate used abbreviations (if any)

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1	GENERAL		P
1.5	Components		P
1.5.1	General	See below.	P
	Comply with IEC 60950-1 or relevant component standard	(see appended tables 1.5.1)	P
1.5.2	Evaluation and testing of components	Components certified to IEC standards and/or their harmonized standards, are used within their ratings and are checked for correct application. Non-certified components are checked for correct application, used within their ratings, tested as part of the equipment and subjected to applicable tests of the component standard. Components, which no relevant IEC-Standard exists, are used within their ratings and are tested under the conditions occurring in the equipment.	P
1.5.3	Thermal controls		N/A
1.5.4	Transformers	Transformers complied with the relevant requirements.	P
1.5.5	Interconnecting cables	Interconnection cable provided with the equipment is carrying signals on energy level below 240 VA. Besides for the insulation materials, there are not other requirements for the interconnection cables.	P
1.5.6	Capacitors bridging insulation	Between lines: subclass X1 or X2 capacitors according to IEC 60384-14 with 21 days damp heat test. Between Line/Neutral and earth: subclass Y1 or Y2 capacitors according to IEC 60384-14.	P
1.5.7	Resistors bridging insulation	See below	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.7.1	Resistors bridging functional, basic or supplementary insulation	The bleeder resistors are located after fuse and the fuse as providing protective device while short-circuited.	P
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable		N/A
1.5.8	Components in equipment for IT power systems	(see appended table 1.5.1)	P
1.5.9	Surge suppressors		N/A
1.5.9.1	General		N/A
1.5.9.2	Protection of VDRs		N/A
1.5.9.3	Bridging of functional insulation by a VDR		N/A
1.5.9.4	Bridging of basic insulation by a VDR		N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N/A

1.6	Power interface		P
1.6.1	AC power distribution systems	Considered	P
1.6.2	Input current	(see appended table 1.6.2)	P
1.6.3	Voltage limit of hand-held equipment		N/A
1.6.4	Neutral conductor	Neutral is insulated from earth and body throughout the equipment and components rated accordingly.	P

1.7	Marking and instructions		P
1.7.1	Power rating and identification markings	The power rating marking is provided and is readily visible in operator access area.	P
1.7.1.1	Power rating marking	See copy of marking plate	P
	Multiple mains supply connections.....:		N/A
	Rated voltage(s) or voltage range(s) (V)	See copy of marking plate	P
	Symbol for nature of supply, for d.c. only		N/A
	Rated frequency or rated frequency range (Hz)	See copy of marking plate	P
	Rated current (mA or A)	See copy of marking plate	P
1.7.1.2	Identification markings		P
	Manufacturer's name or trade-mark or identification mark	See copy of marking plate	P
	Model identification or type reference	See copy of marking plate	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Symbol for Class II equipment only		N/A
	Other markings and symbols	Other markings and symbols do not give rise to misunderstanding.	P
1.7.2	Safety instructions and marking	See below:	P
1.7.2.1	General	Instructions are available.	P
1.7.2.2	Disconnect devices	Appliance inlet provided as disconnect device.	N/A
1.7.2.3	Overcurrent protective device		N/A
1.7.2.4	IT power distribution systems		N/A
1.7.2.5	Operator access with a tool		N/A
1.7.2.6	Ozone		N/A
1.7.3	Short duty cycles		N/A
1.7.4	Supply voltage adjustment		N/A
	Methods and means of adjustment; reference to installation instructions	Same as above.	N/A
1.7.5	Power outlets on the equipment		N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference)	See General product information - Markings and Instructions.	P
1.7.7	Wiring terminals	See below.	P
1.7.7.1	Protective earthing and bonding terminals	Appliance inlet is provided. The symbol IEC 60417-5019 was located on appliance inlet.	P
1.7.7.2	Terminals for a.c. mains supply conductors	The equipment is provided with appliance inlet, which is for connection of a detachable type power supply cord.	N/A
1.7.7.3	Terminals for d.c. mains supply conductors		N/A
1.7.8	Controls and indicators	See below.	P
1.7.8.1	Identification, location and marking	The marking and indication of the power switch is located that indication of function is clearly.	P
1.7.8.2	Colours	No safety involved used.	P
1.7.8.3	Symbols according to IEC 60417	See General product information - Markings and Instructions.	P
1.7.8.4	Markings using figures		N/A
1.7.9	Isolation of multiple power sources		N/A
1.7.10	Thermostats and other regulating devices		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.11	Durability	The marking plate has no curling and is not able to be removed easily.	P
1.7.12	Removable parts	No marking place in removable parts.	P
1.7.13	Replaceable batteries	No such component used.	N/A
	Language(s)		—
1.7.14	Equipment for restricted access locations.....		N/A
2	PROTECTION FROM HAZARDS		P
2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas	See below.	P
2.1.1.1	Access to energized parts		P
	Test by inspection	No access with test finger to any parts with only basic insulation to hazardous voltage. The test pin cannot touch hazardous voltage though any seams within the appliance.	P
	Test with test finger (Figure 2A)	See above.	P
	Test with test pin (Figure 2B)	See above.	P
	Test with test probe (Figure 2C)	No TNV circuit.	N/A
2.1.1.2	Battery compartments		N/A
2.1.1.3	Access to ELV wiring		N/A
	Working voltage (V _{peak} or V _{rms}); minimum distance through insulation (mm)		—
2.1.1.4	Access to hazardous voltage circuit wiring	No hazardous voltage circuit in operator access area.	N/A
2.1.1.5	Energy hazards	See appended table 2.1.1.5. No energy hazards in operator access area.	P
2.1.1.6	Manual controls		N/A
2.1.1.7	Discharge of capacitors in equipment	Voltage decay measurement was conducted with an oscilloscope having an input impedance of 100 MΩ.	P
	Measured voltage (V); time-constant (s).....	See appended table 2.1.1.7.	—
2.1.1.8	Energy hazards – d.c. mains supply		N/A
	a) Capacitor connected to the d.c. mains supply ..		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	b) Internal battery connected to the d.c. mains supply		N/A
2.1.1.9	Audio amplifiers	Complied with 2.1.1.1	P
2.1.2	Protection in service access areas		N/A
2.1.3	Protection in restricted access locations		N/A
2.2	SELV circuits		P
2.2.1	General requirements	See below.	P
2.2.2	Voltages under normal conditions (V)	(see appended table 2.2)	P
2.2.3	Voltages under fault conditions (V)	(see appended table 2.2)	P
2.2.4	Connection of SELV circuits to other circuits	Complied with sub-clauses 2.2.2, 2.2.3 and 2.4.	P
2.3	TNV circuits		N/A
2.3.1	Limits		N/A
	Type of TNV circuits		—
2.3.2	Separation from other circuits and from accessible parts		N/A
2.3.2.1	General requirements		N/A
2.3.2.2	Protection by basic insulation		N/A
2.3.2.3	Protection by earthing		N/A
2.3.2.4	Protection by other constructions		N/A
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed		—
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed		—
2.3.5	Test for operating voltages generated externally		N/A
2.4	Limited current circuits		P
2.4.1	General requirements	The limits of the LCC were not exceeded.	P
2.4.2	Limit values	See below.	P
	Frequency (Hz).....	The alternative Annex D applied (figure D.1 used)	—
	Measured current (mA)	(refer to appended table)	—
	Measured voltage (V).....	(refer to appended table)	—
	Measured circuit capacitance (nF or μ F)	Less than 0.1 μ F	—

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.4.3	Connection of limited current circuits to other circuits		P
-------	--	--	---

2.5	Limited power sources		P
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output under normal operating and single fault condition	For the other outputs of SPS.	P
	d) Overcurrent protective device limited output	For +5V output of SPS.	P
	Max. output voltage (V), max. output current (A), max. apparent power (VA)	(see appended table 2.5)	—
	Current rating of overcurrent protective device (A) ..	4A	—
	Use of integrated circuit (IC) current limiters		—

2.6	Provisions for earthing and bonding		P
2.6.1	Protective earthing	The relevant parts connected to the main protective earthing terminal reliably. Complied with 2.6.3. See General product information - Markings and Instructions	P
2.6.2	Functional earthing	Secondary functional earthing is separated to primary by double or reinforced insulation or by basic insulation and protective earthing. Green-and-yellow color combination was not used for functional earthing conductors.	P
2.6.3	Protective earthing and protective bonding conductors	See below.	P
2.6.3.1	General	See below.	P
2.6.3.2	Size of protective earthing conductors	No power cord provided.	N/A
	Rated current (A), cross-sectional area (mm ²), AWG.....		—
2.6.3.3	Size of protective bonding conductors	Evaluation by test. See sub-clause 2.6.3.4.	P
	Rated current (A), cross-sectional area (mm ²), AWG.....	See above.	—

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Protective current rating (A), cross-sectional area (mm ²), AWG..... :	See above.	—
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min)..... :	(Refer to appended table 2.6.3.4).	P
2.6.3.5	Colour of insulation..... :		N/A
2.6.4	Terminals	See below.	P
2.6.4.1	General	See below.	P
2.6.4.2	Protective earthing and bonding terminals	The earthing terminal in the appliance inlet is regarded as the main protective earthing terminal.	P
	Rated current (A), type, nominal thread diameter (mm)..... :	Evaluation by test.	—
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors	Only protective bonding conductor used in this equipment.	P
2.6.5	Integrity of protective earthing	See below.	P
2.6.5.1	Interconnection of equipment	This unit has its own earthing connection. Any other units connected via the output shall be provided SELV only.	P
2.6.5.2	Components in protective earthing conductors and protective bonding conductors	No switch or overcurrent protective device in bonding conductor.	P
2.6.5.3	Disconnection of protective earth	Appliance inlet provided as disconnection device.	P
2.6.5.4	Parts that can be removed by an operator	Plug or inlet, the earth connection is made before and broken after the hazardous voltage. No other operator removable parts.	P
2.6.5.5	Parts removed during servicing	It is not necessary to disconnect the earth connection except for the removing of the earthed part itself.	P
2.6.5.6	Corrosion resistance	All safety earthing connections in compliance with Annex J.	P
2.6.5.7	Screws for protective bonding		N/A
2.6.5.8	Reliance on telecommunication network or cable distribution system		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.7	Overcurrent and earth fault protection in primary circuits		P
2.7.1	Basic requirements	Protection against overcurrents and short-circuits is provided as an integral part of the equipment. Protection against earth faults is provided as part of the building installation.	P
	Instructions when protection relies on building installation		N/A
2.7.2	Faults not simulated in 5.3.7	Considered.	P
2.7.3	Short-circuit backup protection	The building installation is considered as providing short-circuit backup protection.	P
2.7.4	Number and location of protective devices	The protective device is located adequately therefore able to interrupt the overcurrent flowing in any possible fault current path.	P
2.7.5	Protection by several devices	Only one fuse provided.	N/A
2.7.6	Warning to service personnel	No service work necessary.	N/A

2.8	Safety interlocks		N/A
2.8.1	General principles		N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
	Protection against extreme hazard		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches, relays and their related circuits		N/A
2.8.7.1	Separation distances for contact gaps and their related circuits (mm)		N/A
2.8.7.2	Overload test		N/A
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

2.9	Electrical insulation		P
------------	------------------------------	--	----------

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.9.1	Properties of insulating materials	Natural rubber, asbestos or hygroscopic materials are not used.	P
2.9.2	Humidity conditioning	Tested for 120 hrs.	P
	Relative humidity (%), temperature (°C) :	95% R.H., 40°C	—
2.9.3	Grade of insulation	Basic, supplementary, double insulation, reinforced or functional insulation.	P
2.9.4	Separation from hazardous voltages	See below.	P
	Method(s) used :	Method 1.	—

2.10	Clearances, creepage distances and distances through insulation		P
2.10.1	General		P
2.10.1.1	Frequency :		P
2.10.1.2	Pollution degrees :	2	P
2.10.1.3	Reduced values for functional insulation	See 5.3.4	P
2.10.1.4	Intervening unconnected conductive parts	Complied.	P
2.10.1.5	Insulation with varying dimensions		N/A
2.10.1.6	Special separation requirements		N/A
2.10.1.7	Insulation in circuits generating starting pulses		N/A
2.10.2	Determination of working voltage	See below	P
2.10.2.1	General	Considered.	P
2.10.2.2	RMS working voltage	See appended table 2.10.2	P
2.10.2.3	Peak working voltage	See appended table 2.10.2	P
2.10.3	Clearances	See below	P
2.10.3.1	General	Annex F is considered.	P
2.10.3.2	Mains transient voltages	See below.	P
	a) AC mains supply :	2500 Vpk considered.	P
	b) Earthed d.c. mains supplies :		N/A
	c) Unearthed d.c. mains supplies :		N/A
	d) Battery operation :		N/A
2.10.3.3	Clearances in primary circuits	(see appended table 2.10.3 and 2.10.4)	P
2.10.3.4	Clearances in secondary circuits	Refer to sub-clause 5.3.4	N/A
2.10.3.5	Clearances in circuits having starting pulses		N/A
2.10.3.6	Transients from a.c. mains supply :		N/A
2.10.3.7	Transients from d.c. mains supply :		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.3.8	Transients from telecommunication networks and cable distribution systems		N/A
2.10.3.9	Measurement of transient voltage levels		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network :		N/A
2.10.4	Creepage distances	See below.	P
2.10.4.1	General	Considered.	P
2.10.4.2	Material group and comparative tracking index	Material group IIIb assumed.	P
	CTI tests.....	See above.	—
2.10.4.3	Minimum creepage distances	(see appened table 2.10.3 and 2.10.4)	P
2.10.5	Solid insulation	Complied with 2.10.5.2 to 2.10.5.14 and 5.2	P
2.10.5.1	General	See below.	P
2.10.5.2	Distances through insulation	(see appended table 2.10.5)	P
2.10.5.3	Insulating compound as solid insulation	Approved sources of optocoupler provide min. 0.4 mm distance through insulation for reinforced insulation. See appended table 1.5.1 for internal distance.	P
2.10.5.4	Semiconductor devices	See 2.10.5.3.	P
2.10.5.5.	Cemented joints	See appended table 1.5.1 for optocoupler distances.	P
2.10.5.6	Thin sheet material – General	Considered.	P
2.10.5.7	Separable thin sheet material	Reinforced insulation.	P
	Number of layers (pcs).....	See appended table 5.2.	—
2.10.5.8	Non-separable thin sheet material		N/A
2.10.5.9	Thin sheet material – standard test procedure		N/A
	Electric strength test		—
2.10.5.10	Thin sheet material – alternative test procedure	See below.	P
	Electric strength test	(see appended table 5.2)	—
2.10.5.11	Insulation in wound components		N/A
2.10.5.12	Wire in wound components	Reinforced insulation.	P
	Working voltage	See appended table 2.10.2.	P
	a) Basic insulation not under stress		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	b) Basic, supplementary, reinforced insulation :	Approved sources used for reinforced insulation.	P
	c) Compliance with Annex U :	Approved sources used.	P
	Two wires in contact inside wound component; angle between 45° and 90° :	Insulating sleeving or tape provided.	P
2.10.5.13	Wire with solvent-based enamel in wound components		N/A
	Electric strength test		—
	Routine test		N/A
2.10.5.14	Additional insulation in wound components		N/A
	Working voltage :		N/A
	- Basic insulation not under stress :		N/A
	- Supplementary, reinforced insulation :		N/A
2.10.6	Construction of printed boards		P
2.10.6.1	Uncoated printed boards		P
2.10.6.2	Coated printed boards		N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N/A
2.10.6.4	Insulation between conductors on different layers of a printed board		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs)..... :		N/A
2.10.7	Component external terminations	(see appended table 2.10.3 and 2.10.4)	P
2.10.8	Tests on coated printed boards and coated components		N/A
2.10.8.1	Sample preparation and preliminary inspection		N/A
2.10.8.2	Thermal conditioning		N/A
2.10.8.3	Electric strength test		N/A
2.10.8.4	Abrasion resistance test		N/A
2.10.9	Thermal cycling	Approved sources of opto-couplers used. For detail see table 1.5.1.	P
2.10.10	Test for Pollution Degree 1 environment and insulating compound	See above.	P
2.10.11	Tests for semiconductor devices and cemented joints		N/A
2.10.12	Enclosed and sealed parts		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3	WIRING, CONNECTIONS AND SUPPLY		P
3.1	General		P
3.1.1	Current rating and overcurrent protection	All internal wires are UL recognized, PVC insulated, VW-1 and have gauge suitable for current intended to be carried. No internal wire for primary power distribution.	P
3.1.2	Protection against mechanical damage	The wireways including holes are smooth and free from sharp edges.	P
3.1.3	Securing of internal wiring	Internal wires are secured by soldering and quick connector or other mechanical fixing means so that a loosening of the terminal connection is unlikely.	P
3.1.4	Insulation of conductors	The insulation of the individual conductors is suitable for the application and the working voltage. For the insulation material see 3.1.1.	P
3.1.5	Beads and ceramic insulators		N/A
3.1.6	Screws for electrical contact pressure		N/A
3.1.7	Insulating materials in electrical connections	All current carrying connections made by metal to metal.	P
3.1.8	Self-tapping and spaced thread screws		N/A
3.1.9	Termination of conductors	All conductors are reliably secured by solder-pin or glued or other mechanical fixing means.	P
	10 N pull test	Complied.	P
3.1.10	Sleeving on wiring		N/A
3.2	Connection to a mains supply		P
3.2.1	Means of connection	See below.	P
3.2.1.1	Connection to an a.c. mains supply	Appliance inlet provided.	P
3.2.1.2	Connection to a d.c. mains supply		N/A
3.2.2	Multiple supply connections		N/A
3.2.3	Permanently connected equipment		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Number of conductors, diameter of cable and conduits (mm)		—
3.2.4	Appliance inlets	The appliance inlet complied with IEC 60320-1; the connector inserted without difficulty and not supporting the equipment on a flat surface.	P
3.2.5	Power supply cords		N/A
3.2.5.1	AC power supply cords		N/A
	Type		—
	Rated current (A), cross-sectional area (mm ²), AWG		—
3.2.5.2	DC power supply cords		N/A
3.2.6	Cord anchorages and strain relief		N/A
	Mass of equipment (kg), pull (N)		—
	Longitudinal displacement (mm)		—
3.2.7	Protection against mechanical damage	No parts under this unit likely to damage the power supply cords. Enclosure without sharp edges.	P
3.2.8	Cord guards		N/A
	Diameter or minor dimension D (mm); test mass (g)		—
	Radius of curvature of cord (mm)		—
3.2.9	Supply wiring space		N/A

3.3	Wiring terminals for connection of external conductors		N/A
3.3.1	Wiring terminals		N/A
3.3.2	Connection of non-detachable power supply cords		N/A
3.3.3	Screw terminals		N/A
3.3.4	Conductor sizes to be connected		N/A
	Rated current (A), cord/cable type, cross-sectional area (mm ²)		—
3.3.5	Wiring terminal sizes		N/A
	Rated current (A), type, nominal thread diameter (mm)		—
3.3.6	Wiring terminal design		N/A
3.3.7	Grouping of wiring terminals		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

3.3.8	Stranded wire		N/A
-------	---------------	--	-----

3.4	Disconnection from the mains supply		P
3.4.1	General requirement	See below.	P
3.4.2	Disconnect devices	Appliance inlet is considered as disconnect device.	P
3.4.3	Permanently connected equipment		N/A
3.4.4	Parts which remain energized	When the power cord is removed from the inlet no remaining parts with hazardous voltage in the equipment.	P
3.4.5	Switches in flexible cords		N/A
3.4.6	Number of poles - single-phase and d.c. equipment	The disconnect device disconnects both poles simultaneously.	P
3.4.7	Number of poles - three-phase equipment		N/A
3.4.8	Switches as disconnect devices		N/A
3.4.9	Plugs as disconnect devices		N/A
3.4.10	Interconnected equipment		N/A
3.4.11	Multiple power sources	Single mains supply provided.	N/A

3.5	Interconnection of equipment		P
3.5.1	General requirements	See below.	P
3.5.2	Types of interconnection circuits	SELV circuit.	P
3.5.3	ELV circuits as interconnection circuits		N/A
3.5.4	Data ports for additional equipment	The data ports are for signal transmission and the additional equipment or accessories don't rely on the port connection to comply with sc 4.7. Others see appended table 2.5.	P

4	PHYSICAL REQUIREMENTS		P
4.1	Stability		P
	Angle of 10°		P
	Test force (N)		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.2	Mechanical strength		P
4.2.1	General	See below. After the tests, the equipment complies with the requirements of sub-clauses 2.1.1, 2.6.1 and 2.10.	P
	Rack-mounted equipment.		N/A
4.2.2	Steady force test, 10 N	10 N applied to all components other than the parts serving as an enclosure.	P
4.2.3	Steady force test, 30 N		N/A
4.2.4	Steady force test, 250 N	After subjected 250 N for all material sources, no energy or other hazards.	P
4.2.5	Impact test	No hazard as result from the steel ball impact test for all material sources.	P
	Fall test	See above.	P
	Swing test	See above.	P
4.2.6	Drop test; height (mm)		N/A
4.2.7	Stress relief test	70°C	P
4.2.8	Cathode ray tubes		N/A
	Picture tube separately certified		N/A
4.2.9	High pressure lamps		N/A
4.2.10	Wall or ceiling mounted equipment; force (N)	For unit an additional force of 19.08kg (3 times the mass of the unit and the mass is 6.36kg without base) was applied to the unit with the VESA adaptor kit. The unit withstood the load test without damages or breaks from the VESA adaptor kit. VESA compatible wall mounting kit, 100 × 100 mm, four M4 size with 8.5 mm length screws to secure.	P

4.3	Design and construction		P
4.3.1	Edges and corners	The edges and corners are rounded and smoothed.	P
4.3.2	Handles and manual controls; force (N)		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.3.3	Adjustable controls		N/A
4.3.4	Securing of parts	Electrical and mechanical connections can be expected to withstand usual mechanical stress. No loosening of clearance or creepage impairing distances likely to occur.	P
4.3.5	Connection by plugs and sockets	No mismatch of connectors, plugs or socket possible.	P
4.3.6	Direct plug-in equipment		N/A
	Torque		—
	Compliance with the relevant mains plug standard		N/A
4.3.7	Heating elements in earthed equipment		N/A
4.3.8	Batteries		N/A
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
4.3.9	Oil and grease		N/A
4.3.10	Dust, powders, liquids and gases		N/A
4.3.11	Containers for liquids or gases		N/A
4.3.12	Flammable liquids		N/A
	Quantity of liquid (l)		N/A
	Flash point (°C)		N/A
4.3.13	Radiation	See below.	P
4.3.13.1	General	See below.	P
4.3.13.2	Ionizing radiation		N/A
	Measured radiation (pA/kg)		—
	Measured high-voltage (kV)		—
	Measured focus voltage (kV)		—
	CRT markings		—
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N/A
	Part, property, retention after test, flammability classification		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.3.13.5	Lasers (including laser diodes) and LEDs	See below.	P
4.3.13.5.1	Lasers (including laser diodes)		N/A
	Laser class		—
4.3.13.5.2	Light emitting diodes (LEDs)	The following parts are considered complied without tests: Indicating lights. Optocouplers. For LED backlight, the luminance is far less than 10000 cd/m ² . With reference to sub clause 4.1 of IEC 62471:2006 no further test is necessary.	P
4.3.13.6	Other types		N/A

4.4	Protection against hazardous moving parts		N/A
4.4.1	General		N/A
4.4.2	Protection in operator access areas		N/A
	Household and home/office document/media shredders		N/A
4.4.3	Protection in restricted access locations		N/A
4.4.4	Protection in service access areas		N/A
4.4.5	Protection against moving fan blades		N/A
4.4.5.1	General		N/A
	Not considered to cause pain or injury. a).....:		N/A
	Is considered to cause pain, not injury. b)		N/A
	Considered to cause injury. c)		N/A
4.4.5.2	Protection for users		N/A
	Use of symbol or warning		N/A
4.4.5.3	Protection for service persons		N/A
	Use of symbol or warning		N/A

4.5	Thermal requirements		P
4.5.1	General	No exceeding temperature.	P
4.5.2	Temperature tests	See appended table 4.5.	P
	Normal load condition per Annex L	(See Annex L)	—
4.5.3	Temperature limits for materials	(see appended table 4.5)	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.5.4	Touch temperature limits	(see appended table 4.5)	P
4.5.5	Resistance to abnormal heat	Phenolic material used without further test. No other materials used.	P
4.6	Openings in enclosures		P
4.6.1	Top and side openings	See below.	P
	Dimensions (mm)	(see appended table 4.6.1 and 4.6.2)	—
4.6.2	Bottoms of fire enclosures	See below.	P
	Construction of the bottom, dimensions (mm) ..	(see appended table 4.6.1 and 4.6.2)	—
4.6.3	Doors or covers in fire enclosures		N/A
4.6.4	Openings in transportable equipment		N/A
4.6.4.1	Constructional design measures		N/A
	Dimensions (mm)		—
4.6.4.2	Evaluation measures for larger openings		N/A
4.6.4.3	Use of metallized parts		N/A
4.6.5	Adhesives for constructional purposes		N/A
	Conditioning temperature (°C), time (weeks).....		—
4.7	Resistance to fire		P
4.7.1	Reducing the risk of ignition and spread of flame	See below.	P
	Method 1, selection and application of components wiring and materials	Materials with the required flammability classes are used.	P
	Method 2, application of all of simulated fault condition tests	Components R949, R948, ZD906 and C952 closed to openings when vertical orientation.	P
4.7.2	Conditions for a fire enclosure	See below.	P
4.7.2.1	Parts requiring a fire enclosure	Following parts require a fire enclosure: ▪ Components in primary circuits ▪ Components in secondary circuits not supplied by limited power source ▪ Insulating wiring	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.2.2	Parts not requiring a fire enclosure	Having employed the following components: ▪ PVC insulated wires. ▪ Components in secondary circuits supplied by LPS and mounted on V-1 material. (Main board and USB board) ▪ Circuits complied with method 2 of 4.7.1	P
4.7.3	Materials		P
4.7.3.1	General	The PCBs have material of flammability class V-1 or better.	P
4.7.3.2	Materials for fire enclosures	See table 1.5.1	P
4.7.3.3	Materials for components and other parts outside fire enclosures	HB min.	P
4.7.3.4	Materials for components and other parts inside fire enclosures	Internal components except small parts are flammability class V-2 or better.	P
4.7.3.5	Materials for air filter assemblies		N/A
4.7.3.6	Materials used in high-voltage components		N/A

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		P
5.1	Touch current and protective conductor current		P
5.1.1	General	See appended table 5.1. See sub-clauses 5.1.2 to 5.1.6.	P
5.1.2	Configuration of equipment under test (EUT)	See below.	P
5.1.2.1	Single connection to an a.c. mains supply	The EUT has only one mains connection.	P
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N/A
5.1.3	Test circuit	Test circuit in Figure 5A used.	P
5.1.4	Application of measuring instrument	Measuring instruments as in annex D used.	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.5	Test procedure	The touch current was measured from mains to metal enclosure, plastic enclosure with metal foil, and output connectors.	P
5.1.6	Test measurements	See appended table 5.1.	P
	Supply voltage (V)	See appended table 5.1.	—
	Measured touch current (mA)	See appended table 5.1.	—
	Max. allowed touch current (mA)	See appended table 5.1.	—
	Measured protective conductor current (mA)		—
	Max. allowed protective conductor current (mA)...		—
5.1.7	Equipment with touch current exceeding 3,5 mA		N/A
5.1.7.1	General		N/A
5.1.7.2	Simultaneous multiple connections to the supply		N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks		N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system		N/A
	Supply voltage (V)		—
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
5.1.8.2	Summation of touch currents from telecommunication networks		N/A
	a) EUT with earthed telecommunication ports		N/A
	b) EUT whose telecommunication ports have no reference to protective earth		N/A
5.2	Electric strength		P
5.2.1	General	See appended table 5.2.	P
5.2.2	Test procedure	Table 5B used.	P
5.3	Abnormal operating and fault conditions		P
5.3.1	Protection against overload and abnormal operation	See appended table 5.3.	P
5.3.2	Motors		N/A
5.3.3	Transformers	The test results of short-circuited and overload. (see appended table 5.3 and Annex C)	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.3.4	Functional insulation.....:	Functional insulation complied with the requirements c).	P
5.3.5	Electromechanical components		N/A
5.3.6	Audio amplifiers in ITE	See appended table.	P
5.3.7	Simulation of faults	Complied.	P
5.3.8	Unattended equipment		N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions	See appended table.	P
5.3.9.1	During the tests		P
5.3.9.2	After the tests	Electric strength test made.	P
6	CONNECTION TO TELECOMMUNICATION NETWORKS		N/A
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements		N/A
	Supply voltage (V)		—
	Current in the test circuit (mA)		—
6.1.2.2	Exclusions		N/A
6.2	Protection of equipment users from overvoltages on telecommunication networks		N/A
6.2.1	Separation requirements		N/A
6.2.2	Electric strength test procedure		N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A
6.3	Protection of the telecommunication wiring system from overheating		N/A
	Max. output current (A)		—
	Current limiting method		—
7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N/A
7.1	General		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system		N/A
7.4	Insulation between primary circuits and cable distribution systems		N/A
7.4.1	General		N/A
7.4.2	Voltage surge test		N/A
7.4.3	Impulse test		N/A

A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N/A
A.1.1	Samples		—
	Wall thickness (mm)		—
A.1.2	Conditioning of samples; temperature (°C)		N/A
A.1.3	Mounting of samples		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D		—
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material		—
	Wall thickness (mm)		—
A.2.2	Conditioning of samples; temperature (°C)		N/A
A.2.3	Mounting of samples		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C		—
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Sample 1 burning time (s)..... :		—
	Sample 2 burning time (s)..... :		—
	Sample 3 burning time (s)..... :		—
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A
	Sample 1 burning time (s)..... :		—
	Sample 2 burning time (s)..... :		—
	Sample 3 burning time (s)..... :		—
A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A

B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		N/A
B.1	General requirements		N/A
	Position		—
	Manufacturer		—
	Type		—
	Rated values		—
B.2	Test conditions		N/A
B.3	Maximum temperatures		N/A
B.4	Running overload test		N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days)		—
	Electric strength test: test voltage (V)		—
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V)		N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.7.4	Electric strength test; test voltage (V)		N/A
B.8	Test for motors with capacitors		N/A
B.9	Test for three-phase motors		N/A
B.10	Test for series motors		N/A
	Operating voltage (V)		—

C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		P
	Position	Refer to appended table 1.5.1	—
	Manufacturer	See above.	—
	Type	See above.	—
	Rated values	See above.	—
	Method of protection	Overcurrent protection by circuit design.	—
C.1	Overload test	(see appended table 5.3)	P
C.2	Insulation	(see appended table 5.2)	P
	Protection from displacement of windings	See appended table C.2.	P

D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		P
D.1	Measuring instrument	Figure D.1 used	P
D.2	Alternative measuring instrument		N/A

E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N/A
----------	--	--	------------

F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)		P
----------	---	--	----------

G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N/A
G.1	Clearances		N/A
G.1.1	General		N/A
G.1.2	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply		N/A
G.2.2	Earthed d.c. mains supplies		N/A
G.2.3	Unearthed d.c. mains supplies		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.2.4	Battery operation		N/A
G.3	Determination of telecommunication network transient voltage (V)		N/A
G.4	Determination of required withstand voltage (V)		N/A
G.4.1	Mains transients and internal repetitive peaks		N/A
G.4.2	Transients from telecommunication networks		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
G.5	Measurement of transient voltages (V)		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
G.6	Determination of minimum clearances		N/A
H	ANNEX H, IONIZING RADIATION (see 4.3.13)		N/A
J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		P
	Metal(s) used	Complied.	—
K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)		N/A
K.1	Making and breaking capacity		N/A
K.2	Thermostat reliability; operating voltage (V)		N/A
K.3	Thermostat endurance test; operating voltage (V)		N/A
K.4	Temperature limiter endurance; operating voltage (V)		N/A
K.5	Thermal cut-out reliability		N/A
K.6	Stability of operation		N/A
L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)		P
L.1	Typewriters		N/A
L.2	Adding machines and cash registers		N/A
L.3	Erasers		N/A
L.4	Pencil sharpeners		N/A
L.5	Duplicators and copy machines		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
L.6	Motor-operated files		N/A
L.7	Other business equipment	See summary of testing.	P
M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N/A
M.1	Introduction		N/A
M.2	Method A		N/A
M.3	Method B		N/A
M.3.1	Ringling signal		N/A
M.3.1.1	Frequency (Hz)		—
M.3.1.2	Voltage (V)		—
M.3.1.3	Cadence; time (s), voltage (V)		—
M.3.1.4	Single fault current (mA)		—
M.3.2	Tripping device and monitoring voltage		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V)		N/A
N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)		N/A
N.1	ITU-T impulse test generators		N/A
N.2	IEC 60065 impulse test generator		N/A
P	ANNEX P, NORMATIVE REFERENCES		—
Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)		N/A
	a) Preferred climatic categories		N/A
	b) Maximum continuous voltage		N/A
	c) Pulse current		N/A
R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)		N/A
R.2	Reduced clearances (see 2.10.3)		N/A
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
S.1	Test equipment		N/A
S.2	Test procedure		N/A
S.3	Examples of waveforms during impulse testing		N/A
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N/A
			—
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		P
		Approved source used.	—
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		P
V.1	Introduction	Considered.	P
V.2	TN power distribution systems	Considered.	P
W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N/A
W.1	Touch current from electronic circuits		N/A
W.1.1	Floating circuits		N/A
W.1.2	Earthed circuits		N/A
W.2	Interconnection of several equipments		N/A
W.2.1	Isolation		N/A
W.2.2	Common return, isolated from earth		N/A
W.2.3	Common return, connected to protective earth		N/A
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N/A
X.1	Determination of maximum input current		N/A
X.2	Overload test procedure		N/A
Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N/A
Y.1	Test apparatus		N/A
Y.2	Mounting of test samples		N/A
Y.3	Carbon-arc light-exposure apparatus		N/A
Y.4	Xenon-arc light exposure apparatus		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)		N/A
AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)		N/A
BB	ANNEX BB, CHANGES IN THE SECOND EDITION		—
CC	ANNEX CC, Evaluation of integrated circuit (IC) current limiters		N/A
CC.1	General		N/A
CC.2	Test program 1.....:		N/A
CC.3	Test program 2.....:		N/A
DD	ANNEX DD, Requirements for the mounting means of rack-mounted equipment		N/A
DD.1	General		N/A
DD.2	Mechanical strength test, variable N.....:		N/A
DD.3	Mechanical strength test, 250N, including end stops.....:		N/A
DD.4	Compliance.....:		N/A
EE	ANNEX EE, Household and home/office document/media shredders		N/A
EE.1	General		N/A
EE.2	Markings and instructions		N/A
	Use of markings or symbols.....:		N/A
	Information of user instructions, maintenance and/or servicing instructions.....:		N/A
EE.3	Inadvertent reactivation test.....:		N/A
EE.4	Disconnection of power to hazardous moving parts:		N/A
	Use of markings or symbols.....:		N/A
EE.5	Protection against hazardous moving parts		N/A
	Test with test finger (Figure 2A)		N/A
	Test with wedge probe (Figure EE1 and EE2)		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾	
LCD Monitor						
LCD Panel	Liquid Crystal Display	LM290WW* (* in model name can be 0-9, A-Z or blank)	29" TFT-LCD	--	--	
Plastic Enclosure	Cheil	VH-0810, VE-1890(+), TP-1100(+), NH-1017T, NH-1017(+), VE-0812, NH-1000T+, GC-1017(+)	V0 or better, thickness 1.6 mm min.	UL 94	UL	
	Grand	D-1000A	V0 or better, thickness 1.6 mm min.	UL 94	UL	
	LG	AF-312T1, AF-342T, GN-5001TF, GN-5001RF, GN-5001RFT, GN-5008HF	V0 or better, thickness 1.6 mm min.	UL 94	UL	
	KingFa	HF-606, HF-626, FRABS-518, JH960 6(M), FRHIPS-960	V0 or better, thickness 1.6 mm min.	UL 94	UL	
	Bayer	FR2000, FR3005	V0 or better, thickness 1.6 mm min.	UL 94	UL	
	TEIJIN	TN-7500, MN-3600H, MN-3600HA	V0 or better, thickness 1.6 mm min.	UL 94	UL	
Metal Enclosure	---	--	Metal, thickness 0.6 mm min.	--	--	
Metal plate (attached on bottom and left metal enclosure)	---	--	Metal, thickness 0.21 mm min.	--	--	
Base Stand (Optional)	--	--	HB or batter, weight : 2.94 kg	UL 94	UL	
Speaker (2 set)	--	--	4ohm, 2.5W	--	--	

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
PCB	--	--	V-1 or batter Min. 105°C	UL 94, UL 796	UL
Switching power supply: 715G5764 by TPV					
AC Inlet (CN901)	Rong Feng	SS-7B , SS-120	10A, 250Vac, 15A/250Vac	EN 60320-1, UL 498	UL, VDE
	Solteam	ST-01	10A, 250Vac, 15A/250Vac	EN 60320-1, UL 498	UL, VDE
	Zhang Jia Gang- Hua Jie	SA-4S	10A, 250Vac, 15A/250Vac	EN 60320-1, UL 498	UL, VDE
	Yueqing Hongchang Radio Co., Ltd	DB-14	10A, 250Vac, 15A/250Vac	EN 60320-1, UL 498	UL, VDE
	Inalways	0707-1, 0711-2, 0714	10A, 250Vac, 15A/250Vac	EN 60320-1, UL 498	UL, VDE
	TECX	TU-301 series	10A, 250Vac, 15A/250Vac	EN 60320-1, UL 498	UL, VDE
	Shenzhen Delikang Electronics Technology (DLK)	CDJ-3, CDJ-3-1	10A, 250Vac, 15A/250Vac	EN 60320-1, UL 498	VDE, UL
Fuse (F901)	Littelfuse / Wickmann	392, 382	T3.15A, 250 Vac	IEC/EN 60127- 1, IEC/EN 60127-3	VDE, UL
	Littelfuse	663 series	T3.15A, 250 Vac	IEC/EN 60127- 1, IEC/EN 60127-3	VDE, UL
	Conquer	MET, MST	T3.15A, 250 Vac	IEC/EN 60127- 1, IEC/EN 60127-3	VDE, UL
	SAVE FUSETECH INC	SR-5, SS-5	T3.15A, 250 Vac	IEC/EN 60127- 1, IEC/EN 60127-3	VDE, UL
	Ever Island Electric Co., Ltd & Walter Electric	2000+, 2010+	T3.15A, 250 Vac	IEC/EN 60127- 1, IEC/EN 60127-3	VDE, UL
	BUSSMANN	SS-5	T3.15A, 250 Vac	IEC/EN 60127- 1, IEC/EN 60127-3	VDE, UL
Bleeder Resistors (R950, R951)	--	SMD type	Max.330KΩ, min. 1/4W (located after fuse , two in series)	--	--

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
Primary IC (U906)	Power Integrations	CAP004DG	825V	--	--
Thermistor (TH901, TH902)	--	--	Min. 2A, min.3Ω, at 25°C	--	--
X-Capacitors (C931, C939) (X1 or X2 type) (Optional)	Hua Jung	MKP	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
	Faratronic	MKP62	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
	Europtronic	MPX	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
	Europtronic	MPX2	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
	KEMET	R.46	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
	Liow Gu	GS-L	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
	Ultra Tech Xiphi	HQX	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
	EPCOS	B3292#	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
	ZHUHAI SUNGHO ELECTRONICS CO LTD	CMPP	Max. 0.47μF, min. 250 Vac	IEC/EN 60384-14:2005, UL 1414	ENEC,UL
Y-Capacitors (C944, C945, C965, C966, C967) (Y1 or Y2 type) (Optional)	Walsin	AH, AC	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	Haohua	CT 7	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, FI, UL
	TDK	CD, CS	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
	Murata	KX, KH	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	JYA-NAY	JN, JY	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	Hongming	F	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	YINAN DON'S ELECTRONI C COMPONENT CO.,LTD	CT81	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	WANSHENG	CT7	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
Bridging-Capacitors (C907, C912) (Y1 type) (Optional)	Walsin	AH	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	Haohua	CT 7	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, FI, UL
	TDK	CD	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	Murata	KX	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	JYA-NAY	JN	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	Hongming	F	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
	YINAN DON'S ELECTRONI C COMPONENT CO.,LTD	CT81	Max. 4700pF, min. 250Vac	IEC/EN 60384-14:2005, UL 1414	VDE, UL
Line Choke (L903, L906) (Optional)	Darfon	73G174-106-DN	105 °C	--	--
	Dadon	73G174-106-H	105 °C	--	--
	ASET	73G174-106-X	105 °C	--	--

IEC 60950-1					
Clause	Requirement + Test			Result - Remark	Verdict
	LI TAI	73G174-106-L	105 °C	--	--
	YAO SHENG	73G174-106-YS	105 °C	--	--
	TPV	73G174-106-V	105 °C	--	--
Line Choke (L901)	YUVA	73G174-166-N	105 °C	--	--
	LI TAI	73G174-166-L	105 °C	--	--
Bleeder Diodes (BD901)	--	--	Min. 2 A, min. 800 Vac	--	--
Transistor (Q902, Q907)	--	--	Min. 3.8A, 600V min.	--	--
Ripple Capacitors (C905)	--	--	100 µF, min. 450 V, min .105 °C	--	--
Current sensor resistor (R966)	--	--	Max.0.47ohm, 2W	--	--
Transformer (T901)	YUVA	380GL32P131N	Class B	Applicable parts of IEC 60950-1 and according to IEC 60085	Accepted by TÜV Rheinland
	TPV	S80GL32P131V	Class B	Applicable parts of IEC 60950-1 and according to IEC 60085	Accepted by TÜV Rheinland
Triple Insulation wire (used in T901)	Cosmolink	TIW-M	130°C	IEC/EN 60950-1 IEC/EN 60065	VDE, TÜV, UL
	FURUKAWA	TEX-E	130°C	IEC/EN 60950-1 IEC/EN 60065	VDE, TÜV, UL
Transformer (T902)	YUVA	380GL32P130N	Class B	Applicable parts of IEC 60950-1 and according to IEC 60085	Accepted by TÜV Rheinland
	TPV	S80GL32P130V	Class B	Applicable parts of IEC 60950-1 and according to IEC 60085	Accepted by TÜV Rheinland
Triple Insulation wire (used in T902)	Cosmolink	TIW-M	130°C	IEC/EN 60950-1 IEC/EN 60065	VDE, TÜV, UL
	FURUKAWA	TEX-E	130°C	IEC/EN 60950-1 IEC/EN 60065	VDE, TÜV, UL

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
Photo couplers (U902, U904, U909)	Sharp	PC123	Di=0.7mm, int.= thermal cycling test, ext.=8.0mm, 5000Vac, 100°C	DIN EN 60747-5-2:2003 IEC/EN 60950-1 UL 1577	VDE, UL, Semko, Nemko, Fimko
	Vishay Semiconductor	TCET1103	Di=0.6mm, int.= 6.0 mm, ext.=8.4mm, 3000Vac, 100°C	DIN EN 60747-5-2:2003 IEC/EN 60950-1 UL 1577	VDE, UL Semko, Fimko
	Everlight Electronics Co., Ltd.	EL817, EL817M	Di=0.5mm, int.= 6.0 mm, ext.=7.7mm, 3000Vac, 100°C	DIN EN 60747-5-2:2003 IEC/EN 60950-1 UL 1577	VDE,UL, Nemko, Semko, Fimko
	TOSHIBA	TLP781F , TLP781	Di=0.4mm, int.cr=thermal cycling, ext. cr=8.0mm, 4800Vac, 100°C	DIN EN 60747-5-2:2003 IEC/EN 60950-1 UL 1577	VDE,UL, Semko, Fimko
	TOSHIBA	TLP421F ,	Di=0.4mm, int.cr=thermal cycling, ext. cr=8.0mm, 5000Vac, 100°C	DIN EN 60747-5-2:2003 IEC/EN 60950-1 UL 1577	VDE,UL, Semko, Fimko
	Renesas	PS2561-1, PS2561L-1, PS2561L1-1, PS2561L2-1, PS2561DL1-1	Di=0.4mm, int.cr=thermal cycling, ext. cr=7.0 mm, 5000Vac, 100°C	DIN EN 60747-5-2:2003 IEC/EN 60950-1 UL 1577	VDE,UL, Nemko, Fimko
	Everlight Electronics Co., Ltd.	EL1013	Di=0.4mm, int.cr=thermal cycling, ext. cr=8.0mm, 3000Vac, 100°C	DIN EN 60747-5-2:2003 IEC/EN 60950-1 UL 1577	VDE, Nemko, Semko, Fimko
PCB	--	--	V-1 or batter Min. 105°C	UL94, UL796	UL
Fuse for L.P.S. +5V (F902)	Littelfuse / Wickmann	392, 382	T4A, 250 Vac	IEC/EN 60127-1, IEC/EN 60127-3	VDE, UL
	Littelfuse	663 series	T4A, 250 Vac	IEC/EN 60127-1, IEC/EN 60127-3	VDE, UL
	Conquer	MET, MST	T4A, 250 Vac	IEC/EN 60127-1, IEC/EN 60127-3	VDE, UL

IEC 60950-1					
Clause	Requirement + Test			Result - Remark	Verdict
	SAVE FUSETECH INC	SR-5, SS-5	T4A, 250 Vac	IEC/EN 60127-1, IEC/EN 60127-3	VDE, UL
	Ever Island Electric Co., Ltd & Walter Electric	2000+, 2010+	T4A, 250 Vac	IEC/EN 60127-1, IEC/EN 60127-3	VDE, UL
	Bussmann	SS-5	T4A, 250 Vac	IEC/EN 60127-1, IEC/EN 60127-3	VDE, UL
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

1.5.1	TABLE: Opto Electronic Devices	P
Manufacturer : See supplementary information		
Type..... : See supplementary information		
Separately tested..... : See supplementary information		
Bridging insulation : Reinforced insulation		
External creepage distance : See supplementary information		
Internal creepage distance : See supplementary information		
Distance through insulation : See supplementary information		
Tested under the following conditions : See supplementary information		
Input..... :		
Output..... :		
supplementary information		
1. See 1.5.1 TABLE: List of critical components for details of sources.		
2. All sources of optocoupler were certified according to DIN EN 60747-5-2 which complies with the requirements and provisions of IEC 60747-5-5.		
3. All sources of optocoupler comply with IEC 60747-5-5.		

1.6.2	TABLE: Electrical data (in normal conditions)					P
U(V)/f(Hz)	I (A)	I _{rated} (A)	P (W)	Fuse #	I _{fuse} (A)	Condition/status
HDMI						
90/50	0.93	--	83.3	F901	0.93	Maximum normal load
90/60	0.94	--	83.4	F901	0.94	Maximum normal load

IEC 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
100/50	0.82	1.0	82.0	F901	0.82	Maximum normal load
100/60	0.82	1.0	82.0	F901	0.82	Maximum normal load
240/50	0.35	0.5	79.1	F901	0.35	Maximum normal load
240/60	0.36	0.5	79.2	F901	0.36	Maximum normal load
264/50	0.33	--	79.1	F901	0.33	Maximum normal load
264/60	0.34	--	79.2	F901	0.34	Maximum normal load
DVI						
90/50	0.92	--	82.2	F901	0.92	Maximum normal load
90/60	0.92	--	82.2	F901	0.92	Maximum normal load
100/50	0.81	1.0	81.0	F901	0.81	Maximum normal load
100/60	0.82	1.0	81.4	F901	0.82	Maximum normal load
240/50	0.35	0.5	78.4	F901	0.35	Maximum normal load
240/60	0.36	0.5	78.4	F901	0.36	Maximum normal load
264/50	0.33	--	78.2	F901	0.33	Maximum normal load
264/60	0.33	--	78.4	F901	0.33	Maximum normal load
VGA						
90/50	0.95	--	84.4	F901	0.95	Maximum normal load
90/60	0.95	--	84.4	F901	0.95	Maximum normal load
100/50	0.83	1.0	83.0	F901	0.83	Maximum normal load
100/60	0.84	1.0	83.7	F901	0.84	Maximum normal load
240/50	0.36	0.5	80.2	F901	0.36	Maximum normal load
240/60	0.36	0.5	80.3	F901	0.36	Maximum normal load
264/50	0.33	--	80.2	F901	0.33	Maximum normal load
264/60	0.34	--	80.3	F901	0.34	Maximum normal load
DISPLAY						
90/50	0.92	--	82.5	F901	0.92	Maximum normal load
90/60	0.92	--	82.8	F901	0.92	Maximum normal load
100/50	0.82	1.0	81.5	F901	0.82	Maximum normal load
100/60	0.82	1.0	81.5	F901	0.82	Maximum normal load
240/50	0.35	0.5	78.5	F901	0.35	Maximum normal load
240/60	0.36	0.5	78.5	F901	0.36	Maximum normal load
264/50	0.33	--	78.4	F901	0.33	Maximum normal load
264/60	0.33	--	78.5	F901	0.33	Maximum normal load

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

2.1.1.5 c) 1)	TABLE: max. V, A, VA test				P
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)	
5V	1.5	5.11	7.5	30.86	
6.3V	3.0	6.2	7.5	41.48	
12V	0.5	11.9	2.2	23.98	
16V	2.0	16.8	6.8	7.48	
supplementary information:					
Supply voltage: 240Vac, 60Hz					

2.1.1.5 c) 2)	TABLE: stored energy		N/A
Capacitance C (μF)	Voltage U (V)	Energy E (J)	
supplementary information:			

2.2	TABLE: evaluation of voltage limiting components in SELV circuits			P
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V peak	V d.c.	
T901				
Pin 7 to Pin 9		40	--	
T902				
Pin 9 to Pin 7,8,11,12		36.4	--	
Pin 10 to Earth		90	--	
After R945,R946,R947		77.4	--	
After C933		44.1	--	
After C934,D910		--	20	C934, D910
LED diver				
L801 to earth		74.1	--	
After D801		--	58.8	D801

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Fault test performed on voltage limiting components	Voltage measured (V) in SELV circuits (V peak or V d.c.)
C934 short	20 Vdc
D910 short	Unit shutdown
D801	Unit shutdown
supplementary information:	
Input Voltage is 240 Vac, 60 Hz	

2.5	TABLE: limited power sources					P
Circuit output tested:						
Note: Measured Uoc (V) with all load circuits disconnected: See below						
Components	Sample No.	Uoc (V)	I _{sc} (A)		VA	
			Meas.	Limit	Meas.	Limit
+5V of SPS						
Normal ¹ .	1	5.19	9.5	1000/Uoc	36.57	250
+6.3V of SPS						
Normal (F903 short)	1	6.03	7.5	8	41.48	100
R917 short	1	6.03	6.8	8	34.88	100
R921 short	1	6.03	7	8	36.33	100
R909 short	1	6.03	6.7	8	34.91	100
+12V of SPS						
Normal	1	12.2	2.2	8	23.98	100
U908 (1-7) short	1	12.2	6.8	8	7.48	100
+16V of SPS						
Normal	1	16.8	6.8	8	7.48	100
R955 short	1	16.8	7.2	8	21.5	100
R956 short	1	16.8	7.2	8	23.72	100
R966 short	1	16.8	0.8	8	5.85	100
supplementary information:						
1. The F902 were by-passed when tested and the fuse breaks the circuit within 120 s with a current equal 210 % of the rated current rating.						
2. The Uoc of HDMI and all USB ports are +5V which supplied by +5V of SPS.						

2.10.2	Table: working voltage measurement	P
---------------	---	----------

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Location	RMS voltage (V)	Peak voltage (V)	Comments
T902 Pin 1 to Pin 8,9,13,14	186	435	
T902 Pin 1 to Pin 10	182	401	
T902 Pin 1 to Pin 12	182	360	
T902 Pin 3 to Pin 8,9,13,14	180	360	
T902 Pin 3 to Pin 10	180	368	
T902 Pin 3 to Pin 12	183	368	
T902 Pin 5 to Pin 8,9,13,14	362	593	Max. Vrms and Vp
T902 Pin 5 to Pin 10	359	568	
T902 Pin 5 to Pin 12	351	572	
T902 Pin 7 to Pin 8,9,13,14	330	468	
T902 Pin 7 to Pin 10	330	489	
T902 Pin 7 to Pin 12	333	551	
T901 Pin 1 to Pin 7	330	489	
T901 Pin 1 to Pin 9	330	448	
T901 Pin 3 to Pin 7	340	593	
T901 Pin 3 to Pin 9	342	614	Max. Vrms and Vp
T901 Pin 4 to Pin 7	180	393	
T901 Pin 4 to Pin 9	180	418	
T901 Pin 5 to Pin 7	180	368	
T901 Pin 5 to Pin 9	180	360	
U909 Pin 1 to Pin 3	182	368	
U909 Pin 1 to Pin 4	181	360	
U909 Pin 2 to Pin 3	182	368	
U909 Pin 2 to Pin 4	180	360	
U902 Pin 1 to Pin 3	179	360	
U902 Pin 1 to Pin 4	171	343	
U902 Pin 2 to Pin 3	179	360	
U902 Pin 2 to Pin 4	171	343	
U904 Pin 1 to Pin 3	169	343	
U904 Pin 1 to Pin 4	169	343	
U904 Pin 2 to Pin 3	168	343	
U904 Pin 2 to Pin 4	168	343	

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

supplementary information:
Measurement under input 240Vac/60Hz

2.10.3 and 2.10.4	TABLE: Clearance and creepage distance measurements						P
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm) ³	cl (mm)	Required cr (mm)	cr (mm)	
Functional:							
Line to Neutral before fuse	420	250	2.3 (1.5*1.48)	4.3	2.5	4.3	
Traces under fuse	420	250	2.3 (1.5*1.48)	3.0	2.5	3.0	
Basic/supplementary:							
Primary to earthed trace	420	250	3.0 (2.0*1.48)	See below	3.0	See below	
Under C944/C945/C965/C967				4.0		4.0	
Under inlet				3.0		3.0	
Primary to earthed components	420	250	3.0 (2.0*1.48)	See below	3.0	See below	
J919 to screw pad				5.6		5.6	
SPS HS3 to metal enclosure				4.0		4.0 min.	
SPS solder pins to metal chassis				6.0		6.0 min.	
TH901 trace to metal enclosure				4.4		4.4	
Reinforced:							
Primary traces to secondary traces	420	250	6.0 (4.0*1.48)	See below	6.0	See below	
Under C907/C912				7.6		7.6	
Under U909/U902/U904				7.8		7.8	
Under T901	614	342	6.9 (4.6*1.48)	8.0	7.0	8.0	
Under T902	593	362	6.9 (4.6*1.48)	8.2	7.4	8.2	
Primary components to secondary components	420	250	6.0 (4.0*1.48)	See below	6.0	See below	
SPS to main board trace				11.0		11.0 min.	
TH901 to CN804				9.2		9.2	

IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
Q903 to D801				9.0		9.0 min.
T901 core to HS7 ^{5.}				12.0		12.0 min.
T902 core to U910 ^{6.}				7.7		7.7 min.
Supplementary information: 1. Functional insulation shorted, see 5.3.4 c). 2. Working voltages of primary circuits to secondary circuits/user accessible parts considered as 420 V pk and 250 V r.m.s. minimum (according to applicable rows of tables 2H and 2L). 3. The required clearances multiplied by 1.48 considering that EUT operates up to 5000m. 4. Metal holder used for SPS fixing. 5. Insulation tape used around whole T901. 6. Insulation tape used on the bottom of T902. 7. For clearance and creepage did not describe above are far larger than limit above. 8. All internal wires are located by mechanical fixings to keep distance.						

2.10.5	TABLE: Distance through insulation measurements					P
Distance through insulation (DTI) at/of:		U peak (V)	U rms (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)
Optocouplers (Reinforced insulation)		420	250	AC 3000	0.4	¹⁾
Supplementary information: 1) See appended table 1.5.1 for the source details.						

4.3.8	TABLE: Batteries								N/A
The tests of 4.3.8 are applicable only when appropriate battery data is not available									
Is it possible to install the battery in a reverse polarity position?									
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition									

IEC 60950-1									
Clause	Requirement + Test					Result - Remark			Verdict
Max. current during fault condition									
Test results:									Verdict
- Chemical leaks									
- Explosion of the battery									
- Emission of flame or expulsion of molten metal									
- Electric strength tests of equipment after completion of tests									
Supplementary information:									

4.3.8	TABLE: Batteries	N/A
Battery category..... : (Lithium, NiMh, NiCad, Lithium Ion ...) Manufacturer : Type / model..... : Voltage : Capacity..... : mAh Tested and Certified by (incl. Ref. No.) : Circuit protection diagram:		

MARKINGS AND INSTRUCTIONS (1.7.13)	
Location of replaceable battery	
Language(s)	
Close to the battery	
In the servicing instructions	
In the operating instructions	

4.5	TABLE: Thermal requirements	P
	Supply voltage (V) : 90/60Hz (Horizontal) 90/60Hz (Vertical) 264/60Hz (Horizontal)	—
	Ambient T _{min} (°C) : -- -- --	—
	Ambient T _{max} (°C) : -- -- --	—

IEC 60950-1				
Clause	Requirement + Test	Result - Remark		Verdict

Maximum measured temperature T of part/at::	T (°C)			Allowed T _{max} (°C)
1.AC inlet pin near line	50.1	50.8	47.9	70
2.PCB near TH901, TH902	82.2	84.6	62.1	105
3.L906 Coil	64.3	65.7	54.9	105
4.C931 Body	60.0	64.0	54.0	85
5.L903 Coil	69.1	68.6	56.8	105
6.PWB near BD901	79.5	81.6	62.8	105
7.C905 Body	66.2	70.9	60.2	105
8.PWB near D902	75.7	75.7	68.8	105
9.L901 Coil	79.5	81.4	68.0	105
10.PWB near Q902	52.9	54.5	50.3	105
11.C912 Body	73.2	72.6	64.9	85
12.U904 Body	73.1	77.8	67.6	100
13.T901 Coil	107	104	101	110
14.T901 Core	104	99.1	98.8	110
15.C907 Body	82.7	71.1	76.7	85
16.U909 Body	96.4	79.5	92.0	100
17.T902 Coil	97.4	81.8	92.5	110
18. T902 Core	92.4	61.5	88.3	110
19.PWB near Q907	93.0	71.5	88.3	105
20. PWB near D910,D903	99.7	86.4	95.2	105
21. PWB near D908,D903	97.3	90.4	92.2	105
22.L801 Coil	103	89.2	98.3	105
23.HS1 (Main Board)	72.0	76.0	71.8	105
24.Panel surface	50.1	47.5	50.0	95
25.Enclosure inside near T901	52.3	41.9	50.3	--
26. Enclosure outside near T901	50.3	40.7	48.4	95
27. Ambient (actual: 25.4/24.8/24.4°C)	40	40	40	--
Supplementary information: 1) The temperatures were measured under worst normal mode defined in 1.2.2.1 and as described in sub-clause 1.6.2 and at voltages as described above. 2) The maximum ambient temperature specified by manufacturer is 40°C (T _{ma}). 3) All values for T(°C) are re-calculated from T _{amb} respectively. 4) VGA mode tested				

IEC 60950-1							
Clause	Requirement + Test				Result - Remark		Verdict
Temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class
Supplementary information:							

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N/A
	Allowed impression diameter (mm): ≤ 2 mm			—
Part		Test temperature (°C)	Impression diameter (mm)	
Plastic enclosure, Kingfa : HIPS-5197, 2.5mm		90	1.59	
Plastic enclosure, Kingfa : GAR-011(L85), 2.5mm		85	1.31	
Plastic enclosure, Kingfa : GAR-011(L65), 2.5mm		85	1.29	
Plastic enclosure, Kingfa : HIPS-510(H), 2.5mm		80	1.29	
Plastic enclosure, Kingfa : FRHIPS-960, 2.5mm		85	1.88	
Plastic enclosure, Cheil : GC-0750(+), 2.5mm		80	1.61	
Plastic enclosure, Cheil : GC-0700(+), 2.5mm		80	1.94	
Plastic enclosure, Cheil : HG-0760(+), 2.5mm		85	1.73	
Plastic enclosure, Cheil : LX-0951(+), 2.5mm		85	1.83	
Plastic enclosure, Cheil : SD-0150, 2.5mm		85	1.48	
Plastic enclosure, Cheil : HR-1360, 2.5mm		85	1.71	
Plastic enclosure, Cheil : BF-0670F, 2.5mm		80	1.59	
Plastic enclosure, LG : HF380, 2.5mm		85	1.48	
Plastic enclosure, LG : SE885, 2.5mm		80	1.42	
Plastic enclosure, LG : LUPOY GP-1000(#), 2.5mm		95	1.21	
Plastic enclosure, LG : XG568, 2.5mm		80	1.81	
Plastic enclosure, LG : XG569C, 2.5mm		80	1.85	
Plastic enclosure, LG : HF388H, 2.5mm		85	1.39	
Plastic enclosure, LG : SE750, 2.5mm		80	1.50	
Plastic enclosure, Teijin : TN-7500, 2.5mm		85	1.57	
Plastic enclosure, ORINKO : HIPS-2000, 2.5mm		85	1.48	
Supplementary information:				
Tested by client's request.				

4.7	TABLE: Resistance to fire					P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	

IEC 60950-1					
Clause	Requirement + Test		Result - Remark		Verdict
Metal enclosure	--	--	1)	--	--
PCB	--	--	--	1)	1)
Plastic enclosure	1)	1)	1)	1)	1)
Supplementary information:					
1) See table 1.5.1 for details.					

5.1	TABLE: touch current measurement			P
Measured between:		Measured (mA)	Limit (mA)	Comments/conditions
Line / Neutral and metal enclosure		1.90	3.5	Switch “e” open
Line / Neutral and output connectors		0.01	0.25	Switch “e” close
Line / Neutral and plastic enclosure with metal foil		0.01	0.25	Switch “e” close
Line / Neutral and metal enclosure		0.88	1.0	Switch “e” open with 110V/60Hz input
Line / Neutral and output connectors		0.01	0.25	Switch “e” close with 110V/60Hz input
Line / Neutral and plastic enclosure with metal foil		0.01	0.25	Switch “e” close with 110V/60Hz input
supplementary information:				
1) Supply voltage: 264V, 60Hz				
2) Overall capacitance: See table 1.5.1				

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests			P
Test voltage applied between:		Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Transformer:				
T901 primary to secondary		AC	3000	No
T901 secondary to core		AC	3000	No
T902 primary to secondary		AC	3000	No
T902 secondary to core		AC	3000	No
One layer of insulation tape		AC	3000	No
Unit:				
Primary to secondary		DC	4242	No
Primary to earth		DC	2706	No

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Primary to plastic enclosure with metal foil		DC	4242
Supplementary information:			No
1. Test was performed on all sources of transformer and tape.			

5.3	TABLE: Fault condition tests					P
	Ambient temperature (°C)				25, if no otherwise specified	—
	Power source for EUT: Manufacturer, model/type, output rating				See appended table 1.5.1	—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
For SPS						
BD901 “+”~“-”	Short	240	1s	F901	--	Fuse opened, no hazards.
U901 PIN 6-8	Short	240	10min	F901	0.14	Unit shutdown, no hazards.
Q902 G-S	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
Q902 G-D	Short	240	1s	F901	--	Fuse opened, no hazards.
Q902 D-S	Short	240	1s	F901	--	Fuse opened, no hazards.
C905	Short	240	1s	F901	--	Fuse opened, no hazards.
T901 PIN 1-3	Short	240	10min	F901	0.06	Unit shutdown, no hazards.
T901 PIN 4-5	Short	240	10min	F901	0.06	Unit shutdown, no hazards.
T901 PIN 7-9	Short	240	10min	F901	0.36	Normally operation, no hazards.
D903 PIN 1-2	Short	240	10min	F901	0.06	Unit shutdown, no hazards.
D910 PIN 1-2	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
D908 PIN 1-2	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
T902 PIN 4-6	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
T902 PIN 1-3	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
T902 PIN 7,8-9	Short	240	10min	F901	0.17	Unit shutdown, no hazards.
T902 PIN 10-11,12	Short	240	10min	F901	0.17	Unit shutdown, no hazards.

IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
Q907 G-S	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
Q907 G-D	Short	240	1s	F901	--	Fuse opened, no hazards.
Q907 D-S	Short	240	1s	F901	--	Fuse opened, no hazards.
U907 PIN 4-6	Short	240	10min	F901	0.15	Unit shutdown, no hazards.
U902 PIN1	Open	240	10min	F901	0.06	Unit shutdown, no hazards.
U902 PIN1-2	Short	240	10min	F901	0.07	Unit shutdown, no hazards.
U902 PIN3-4	Short	240	10min	F901	0.36	Normally operation, no hazards.
U904 PIN1	Open	240	10min	F901	0.06	Unit shutdown, no hazards.
U904 PIN1-2	Short	240	10min	F901	0.07	Unit shutdown, no hazards.
U904 PIN3-4	Short	240	10min	F901	0.36	Normally operation, no hazards.
U909 PIN1	Open	240	10min	F901	0.15	Unit shutdown, no hazards.
U909 PIN1-2	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
U909 PIN3-4	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
U903 PIN1-6	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
CN804 PIN 3- Metal enclosure	Short	240	10min	F901	0.12	Unit shutdown, no hazards.
CN804 PIN3- Secondary connector	Short	240	10min	F901	0.12	Unit shutdown, no hazards.
Output +16V	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
Output +5V	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
Output +6.3V	Short	240	10min	F901	0.09	Unit shutdown, no hazards.
T902 after D910	Overload	240	5hr 58min	F901	0.52	Transformer overload to 2.1A, then unit shut down, no damaged, no hazards. T901 coil/core=89.9°C /87.2°C T902 coil/core=97.4°C /90.0°C Ambient=25.1°C

IEC 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
T901 after D903	Overload	240	3hr 25min	F901	0.38	Transformer overload to 1.1A , then unit shut down , no damaged, no hazards. T901 coil/core=92.5°C /89.3°C T902 coil/core=79.3°C/75.5°C Ambient=24.6°C
T902 after D908	Overload	240	5hr 48min	F901	0.50	Transformer overload to 5A , then unit shut down, no damaged, no hazards. T901 coil/core=87.8°C /85.3°C T902 coil/core=87.7°C/82.1°C Ambient=24.0°C
R949	Short	240	10min	F901	0.36	Normally operation, no hazards.
R948	Short	240	10min	F901	0.36	Normally operation, no hazards.
ZD906	Short	240	10min	F901	0.36	Normally operation, no hazards.
C952	Open	240	10min	F901	0.09	Unit shutdown, no hazards.
For unit						
Speaker	Short	240	10min	F901	--	Speaker output shutdown, no hazard, no damage, unit normal operation.
All ventilation Openings	Blocked	240	2 hs	F901	0.49	Unit normal operated, no damaged, no hazards. T901 coil/core=98.8°C /95.1°C T902 coil/core=91.3°C /85.1°C Ambient=24.6°C
DVI 1 (CN105)	overload	240	10 min	F901	--	Open circuit voltage 4.78V, Maximum available current 0.01 A, no hazard.
DVI 2 (CN110)	overload	240	10 min	F901	--	Open circuit voltage 4.26V, Maximum available current 0.01 A, no hazard.
D-SUB 1 (CN106)	overload	240	10 min	F901	--	Open circuit voltage 4.89V, Maximum available current 0.01 A, no hazard.
D-SUB 2 (CN107)	overload	240	10 min	F901	--	Open circuit voltage 4.36V, Maximum available current 0.01A, no hazard.
HDMI (CN102)	overload	240	10 min	F901	--	Open circuit voltage 5.04V, Maximum available current 1.2A, no hazard.
Audio Input (CN602)	overload	240	10 min	F901	--	Open circuit voltage 0.01V, Maximum available current 0.01A, no hazard.

IEC 60950-1						
Clause	Requirement + Test				Result - Remark	Verdict
Control Sync OUT (CN410)	overload	240	10 min	F901	--	Open circuit voltage 3.23V, Maximum available current 0.01A, no hazard.
Control Sync IN (CN411)	overload	240	10 min	F901	--	Open circuit voltage 0.01V, Maximum available current 0.01A, no hazard.
USB (CN101)	overload	240	10 min	F901	--	Open circuit voltage 0.01V, Maximum available current 0.01A, no hazard.
USB near Panel (CN104)	overload	240	10 min	F901	--	Open circuit voltage 5.04V, Maximum available current 1.6A, no hazard.
USB near Rear (CN104)	overload	240	10 min	F901	--	Open circuit voltage 5.04V, Maximum available current 1.6A, no hazard.
USB near left side (CN201)	overload	240	10 min	F901	--	Open circuit voltage 5.04V, Maximum available current 1.6A, no hazard.
USB near left side (CN202)	overload	240	10 min	F901	--	Open circuit voltage 5.04V, Maximum available current 1.6A, no hazard.
Handset (CN203)	overload	240	10 min	F901	--	Open circuit voltage 0.01V, Maximum available current 0.01A, no hazard.
Supplementary information:						
Tested with all sources of fuse.						

C.2	TABLE: transformers						P
Loc.	Tested insulation	Working voltage peak / V	Working voltage rms / V	Required electric strength	Required clearance / mm	Required creepage distance / mm	Required distance thr. insul.
		(2.10.2)	(2.10.2)	(5.2)	(2.10.3)	(2.10.4)	(2.10.5)
T901	Primary / input winding and secondary / output winding (internal) (DI)	614	342	AC 3000V	6.9 (4.6*1.48)	7.0	2 layers or 3 layers insulation tape
T901	Primary / input winding and core (internal) (BI)	--	--	--	--	--	--
T901	Secondary / output winding and core (internal) (DI)	614	342	AC 3000V	6.9 (4.6*1.48)	7.0	--

IEC 60950-1							
Clause	Requirement + Test			Result - Remark			Verdict
T901	Primary / input part and secondary / output part (external) (DI)	614	342	AC 3000V	6.9 (4.6*1.48)	7.0	--
T901	Primary / input part and secondary / output winding (external) (DI)	614	342	AC 3000V	6.9 (4.6*1.48)	7.0	--
T901	Primary / input part and core (external) (BI)	--	--	--	--	--	--
T901	Secondary / output part and core (external) (DI)	614	342	AC 3000V	6.9 (4.6*1.48)	7.0	--
T901	Secondary / output part and primary / input winding (external) (DI)	614	342	AC 3000V	6.9 (4.6*1.48)	7.0	--
Loc.	Tested insulation			Test voltage/ V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers
T901	Primary / input winding and secondary / output winding (internal) (DI)			AC 3000V	Triple insulation wire used	Triple insulation wire used	--
T901	Primary / input winding and core (internal) (BI)			--	--	--	--
T901	Secondary / output winding and core (internal) (DI)			AC 3000V	Triple insulation wire used	Triple insulation wire used	--
T901	Primary / input part and secondary / output part (external) (DI)			AC 3000V	10	10 min.	--
T901	Primary / input part and secondary / output winding (external) (DI)			AC 3000V	Triple insulation wire used	Triple insulation wire used	--
T901	Primary / input part and core (external) (BI)			--	--	--	--
T901	Secondary / output part and core (external) (DI)			AC 3000V	8.8	8.8	--
T901	Secondary / output part and primary / input winding (external) (DI)			AC 3000V	14	14	--
supplementary information:							
1. The required clearances multiplied by 1.48 considering that EUT operates up to 5000m.							
2. All sources of transformer are similar each other except for material sources.							
3. Triple insulation wires used for secondary windings and the core is considered as primary part.							

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

C.2	TABLE: transformers	P
-----	---------------------	---

Transformer T901:

25u*5mm 胶带2Ts MIN

EPOXY*4
点胶与线包接触

将磁芯向TOP侧推

1 5

FRONT VIEW

Winding Direction

1 5

10

6

E1

6

BOTTOM VIEW

25u*5mm 胶带2Ts MIN

C

D

d

G

10

6

MARKING

1 5

SIDE VIEW

TAPE 25u*24.5mm, 2Ts

外铜箔加工顺序:

1: 包25u*8.5mm胶带1Ts MIN

2: 包25u*7mm铜箔, 铜箔背胶胶带25u*13mm MIN, 引线Φ0.3加套管接PINS.

3: 包25u*8.5mm胶带1Ts MIN

NOTE: 铜箔包法详见PAGE 5 说明

1.GAP CORE TO PIN SIDE,CORE 往TOP端顶;

2. Pin 6,8,10 remove,
Pin 2 cut off 1/2 after solder.

3.STAR & FINISH ADD TEFLON TUBE;

4.FIX CORE BY MYLAR TAPE 2Ts;

5.ALL PIN 1.0 MIN

5.Weight:15.6±2g(1PCS).

NOTE: 1, Lead Wire Composition

Steel 78%

Cu 22%

Sn 99.99% (Thickness 6~11μ)

Lead Free Solder

Sn 98% Cu 2%

mylar tape: 25u*14mm W, 2layers

epoxy

3.0mm MIN

Pri.

④

⑤

③

②

①

N2

N4

N1

Sec.

⑨

⑦

N3

10mm MIN

“●”, WINDING START; “□” TEFLON TUBE

A = 24.0 mm MAX

B = 26.0 mm MAX

C = 19.0 mm MAX

D = 3.5±0.3 mm

E1=4.0±0.5mm

E2= 11.4±0.5mm

G= 7.2 mm MAX

d= 0.8±0.1mm

PIN TUBE	LENGTH
ALL PIN	10mm MIN

TRF No. IEC60950_1C

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

The diagram shows a cross-section of a bobbin with four layers of tape. The layers are labeled N1(1-2) CLOSED, N2(5-4) CLOSED, N3(9-7) CLOSED, and N4(2-3) CLOSED. The tape is 25u*8.5mm. The terminal connections are PIN(1-5) on the left and PIN(6-10) on the right. A red arrow indicates a 7mm MIN fold length for the tape. The bobbin is labeled BOBBIN. NOTE: 1:反折胶带: N1,E1,N2 (25u+25u)*14mmW,反折长度7mm MIN. N4 (25u+25u)*16mmW,反折长度7mm MIN. 2: ALL PIN ADD TUBE.						
NO.	Winding	Terminal	Wire	Turns	Remark	TAPE
						1Ts
1	N1 1-	2	UEW,Φ0.20*1P 36		CLOSED	1Ts
2	N2 5-	4	UEW,Φ0.20*2P 17		CLOSED	2Ts
3	N3 9-	7	TEX-E,Φ0.55*3P 6		CLOSED	2Ts
4	N4 2-	3	UEW,Φ0.20*1P 36		CLOSED	3Ts

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

ITEM	MATERIAL TYPE	UL NO.	FLAM	MANUFACTURER	UL Page
BOBBIN	PM-9820 THICKNESS:0.45mm MIN L:16.0±1.0mm W:22.1±1.0mm H:21.0±1.0mm	E41429	150℃ 94V-0	SUMITOMO BAKELITE CO.,LTD	
WIRE	UEW E310905		130℃	FUJIAN SHANGHANG JINCHENG ENAMELLED COPPER WIRE MANU CO LTD	
	UEW or QA/130	E229341		HANGZHOU WEIFENG ELECTRONIC CO.,LTD	
	xUEW@130 E314752			CHANGZHOU NEW DISTRICT DAYI ELECTRICAL MATERIAL CO.,LTD	
TRIPLE INSULATION WIRE	TEX-E	E206440 TUV T9251520 VDE 6735 NEMKO P05204570/A1	130℃	FURUKAWA ELECTRIC CO.,LTD	
CORE	DMR40.EE22 NH2B.EE22 FP2.EE22 L:5.75±0.25mm W:22.0±0.4mm H:19.0±0.2mm	N/A	N/A	HENGDIAN GROUP DMEGC MAGNETCS CO.,LTD HAINING LIANFENG MA GNET INDUSTRY CO.,LTD NANJING F INEMAG TECHNOLOGY CO.,LTD	
TAPE	NO.35660Y*(%) Thickness: 0.055mm (CTI GPOUP I)	E50292 1	30℃	SYMBIO INC	
	NO.CT(c) CTI GPOUP I) THICKNESS 0.06mm	E165111	130℃	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO. ,LTD	
VARNISH	T-4260a	E228349	130℃	WU JIANG TAIHU INSULATING MATERIAL CO., LTD.	
	BC-346-A BC-346A	E317427 2	00℃	JOHN C.DOLPH CO	
SOLDER	AS9750NC	N/A N/A		安臣锡品制造有限公司	
TUBE	TEFLON TUBING TFL	E156256 2	00℃	GREAT HOLDING INDUSTRIAL CO.,LTD	
EPOXY	E-500(XX) E21	8090	130℃	DONGGUAN EATTO ELECTRONIC	
	3300ZH N/A		N/A	MATERIAL CO.,LTD	

Description of design:

(a) Bobbin

Primary/input pins	See above
Secondary/output pins	See above
Material (manufacturer, type, ratings)	See above
Thickness (mm)	See above

IEC 60950-1							
Clause	Requirement + Test			Result - Remark			Verdict
C.2	TABLE: transformers						P
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)
T902	Primary / input winding and secondary / output winding (internal) (DI)	593	362	AC 3000V	6.9 (4.6*1.48)	7.4	2 layers or 3 layers insulation tape
T902	Primary / input winding and core (internal) (BI)	--	--	--	--	--	--
T902	Secondary / output winding and core (internal) (DI)	593	362	AC 3000V	6.9 (4.6*1.48)	7.4	--
T902	Primary / input part and secondary / output part (external) (DI)	593	362	AC 3000V	6.9 (4.6*1.48)	7.4	--
T902	Primary / input part and secondary / output winding (external) (DI)	593	362	AC 3000V	6.9 (4.6*1.48)	7.4	--
T902	Primary / input part and core (external) (BI)	--	--	--	--	--	--
T902	Secondary / output part and core (external) (DI)	593	362	AC 3000V	6.9 (4.6*1.48)	7.4	--
T902	Secondary / output part and primary / input winding (external) (DI)	593	362	AC 3000V	6.9 (4.6*1.48)	7.4	--
Loc.	Tested insulation			Test voltage/ V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers
T902	Primary / input winding and secondary / output winding (internal) (DI)			AC 3000V	Triple insulation wire used	Triple insulation wire used	--
T902	Primary / input winding and core (internal) (BI)			--	--	--	--
T902	Secondary / output winding and core (internal) (DI)			AC 3000V	Triple insulation wire used	Triple insulation wire used	--
T902	Primary / input part and secondary / output part (external) (DI)			AC 3000V	26	26 min.	--

IEC 60950-1					
Clause	Requirement + Test	Result - Remark			Verdict
T902	Primary / input part and secondary / output winding (external) (DI)	AC 3000V	Triple insulation wire used	Triple insulation wire used	--
T902	Primary / input part and core (external) (BI)	--	--	--	--
T902	Secondary / output part and core (external) (DI)	AC 3000V	7.2	10.2	--
T902	Secondary / output part and primary / input winding (external) (DI)	AC 3000V	6.9	7.4	--
supplementary information:					
1. The required clearances multiplied by 1.48 considering that EUT operates up to 5000m. 2. All sources of transformer are similar each other except for material sources. 3. Triple insulation wires used for secondary windings and the core is considered as primary part.					

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

NOTE:
1: ALL PIN ADD TUBE.

NO.	Winding	Terminal	Wire	Turns	Remark	TAPE
						2Ts
1	N1	4-5	UEW,φ0.35X1	17	CLOSED	1TS
2	N2	1-3	UEW,φ0.16X2	6	CLOSED	1TS
3	N3	9-7,8	TEX-E,φ0.35X6	2	CLOSED	1TS
4	N4	10-11,12	TEX-E,φ0.45X2	6	CLOSED	1TS
5	E1	6-	COPPER FOIL 1mil*8mm W	0.9	LEAD WIRE 0.25*1	1TS
6	N5	5-6	UEW,φ0.35X1	17	CLOSED	3TS

N3 PIN9 外挂

NOTE :N3 線頭在完成 N5 繞組再掛腳 PIN9

Unit:mm

MYLAR TAPE 50u*10mm 1LAYER
MYLAR TAPE 25u*14mm 1LAYER
TUBE
2UEW, φ0.25mmX1
COPPER FOIL:1mil*8mmW. E1

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

ITEM	MATERIAL TYPE	UL NO.	FLAM	MANUFACTURER	UL Page
BOBBIN	PM-9820 BLACK(94V-0) Thickness: 0.45 mm MIN L:31.5±1.0mm W:26.5±1.0mm H:20.9±1.0mm	E41429	150°C	SUMITOMO BAKELITE CO.,LTD	
WIRE	TYP-130 MW 75C	E245514	130°C	HENGYA ELECTRIC KUNSHAN LTD	
	UEW	E310905		FUJIAN SHANGHANG JINCHENG ENAMELLED COPPER WIRE MANU CO LTD	
	UEW or QA/130	E229341		HANGZHOU WEIFENG ELECTRONIC CO.,LTD	
TRIPLE INSULATION WIRE	TEX-E	E206440 TUV T9251520 VDE 6735 NEMKO P05204570/A1	130°C	FURUKAWA ELECTRIC CO.,LTD	
CORE	DMR44,PQ2620 FP2A,PQ2620 NH2C,PQ2620 L: 19.0±0.5mm W: 27.5±1.0mm H:20.2±0.5mm	N/A	N/A	HENGDIAN GROUP DMEGC MAGNETICS CO.,LTD NANJING FINEMAG TECHNOLOGY CO., LTD. LIANFENG MAGNET INDUSTRY CO.,LTD	
TAPE	NO.35660Y*(%) Thickness: 0.035mm (CTI GPOUP I)	E50292	130°C	SYMBIO INC	
	NO.CT(c) CTI GPOUP I) THICKNESS 0.06mm	E165111	130°C	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO.,LTD	
	NO.1350T-1 (CTI GPOUP II) THICKNESS 0.08mm	E17385	130°C	3M COMPANY ELECTRICAL MARKETS DIV (EMD)	
VARNISH	T-4260a	E228349	130°C	WU JIANG TAIHU INSULATING MATERIAL CO., LTD.	
	BC-346-A BC-346A	E317427	200°C	JOHN C.DOLPH CO	
SOLDER	AS9750NC	N/A	N/A	安臣锡品制造有限公司	
TUBE	TEFLON TUBING TFL	E156256	200°C	GREAT HOLDING INDUSTRIAL CO.,LTD	
EPOXY	E-500(OXX)	E218090	130°C	DONGGUAN EATTO ELECTRONIC MATERIAL CO.,LTD	
	3300ZH	N/A	N/A		

Description of design:

(a) Bobbin

Primary/input pins	See above
Secondary/output pins	See above
Material (manufacturer, type, ratings)	See above
Thickness (mm)	See above

IEC 60950-1/Am1			
Clause	Requirement + Test	Result - Remark	Verdict

List of test equipment used:

Clause	Measurement / testing	Testing / measuring equipment / material used	Range used	Calibration date

No listing of test equipment used necessary for chosen test procedure.

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

2.1.1.7	TABLE: Discharge test			P
Condition	τ calculated (s)	τ measured (s)	t u→ 0V (s)	Comments
Line to Neutral	--	0.45	--	$V_O = 375 V_{peak}$, 37 % of $V_O = 138 V_{peak}$, voltage drop to 42 V_{peak} after 1 s
Supplementary information: Supply voltage: 264 Vac, 60 Hz Overall capacity and bleeder resistor: see appended table 1.5.1				

2.4.2	TABLE: Limited current circuit measurement				P
Location	Voltage (V)	Current (mA)	Freq. (kHz)	Limit (mA)	Comments
C907 Secondary pin to Earth	0.3	0.6	--	0.7	1.
C921 Secondary pin to Earth	0.3	0.6	--	0.7	1.
C907 Secondary pin to Earth	--	0.4 MIU	--	0.5 MIU	2.
C921 Secondary pin to Earth	--	0.4 MIU	--	0.5 MIU	2.
Supplementary information: 1. Figure D.1 used for test 2. Test by client's request.					

2.6.3.4	TABLE: Resistance of earthing measurement		P
Location	Resistance measured (mΩ)	Comments	
The earth pin of appliance inlet to metal enclosure/chassis	8	Test current at 32A, for 2mins	
The earth pin of appliance inlet to metal enclosure	--	Test current at 40A, for 2mins, voltage drop to 0.32V.	
The earth pin of appliance inlet to C944/C945 earthed trace	6	Test current at 32A, for 2mins	
The earth pin of appliance inlet to C944/C945 earthed trace	--	Test current at 40A, for 2mins, voltage drop to 0.28V.	
Supplementary information:			

4.6.1, 4.6.2	Table: Enclosure opening measurements	P
--------------	---------------------------------------	---

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Location	Size (mm)	Comments
Normal		
Top	1) $\varnothing$ 4.8 2) 19.7x12.8 3) 12.5x6.1	1) Numerous circular openings provided. 2) One opening for main board. 3) One opening for main board.
Rear	1) $\varnothing$ 4.8 centre to centre= 4.9 min., metal thickness= 0.81 2) 50x35 3) $\varnothing$ 4.8 4) $\varnothing$ 14.5 5) 12x18	1) Numerous circular openings provided for SPS and covered by plastic enclosure without opening. 2) One opening provided for main board. 3) Numerous circular openings provided for main board. 4) Two openings provided for main board. 5) One opening provided for main board.
Right	1) 30x10.5 2) $\varnothing$ 4.8	1) One opening for main board. 2) Numerous circular openings provided for main board.
Left	$\varnothing$ 1.7 centre to centre= 4.9 min., metal thickness= 0.81	Numerous circular openings provided for SPS.
Bottom	1) $\varnothing$ 1.9 centre to centre= 3.7 min., metal thickness= 0.81 2) $\varnothing$ 1.7 centre to centre= 4.9 min., metal thickness= 0.81	Numerous circular openings provided.
Others	None	--
Vertical		
Left	1) $\varnothing$ 4.8 2) 19.7x12.8 3) 12.5x6.1	1) Numerous circular openings provided and few components complied with the method 2 of 4.7.1 2) One opening for main board. 3) One opening for main board.
Rear	1) $\varnothing$ 4.8 centre to centre= 4.9 min., metal thickness= 0.81 2) 50x35 3) $\varnothing$ 4.8 4) $\varnothing$ 14.5 5) 12x18	1) Numerous circular openings provided for SPS and covered by plastic enclosure without opening. 2) One opening provided for main board. 3) Numerous circular openings provided for main board. 4) Two openings provided for main board. 5) One opening provided for main board.

Clause	Requirement + Test	Result - Remark	Verdict
Top	1) 30x10.5 2) $\varnothing$ 4.8	1) One opening for main board. 2) Numerous circular openings provided for main board.	
Bottom	$\varnothing$ 1.7 centre to centre= 4.9 min., metal thickness= 0.81	Numerous circular openings provided for SPS.	
Right	1) $\varnothing$ 1.9 centre to centre= 3.7 min., metal thickness= 0.81 2) $\varnothing$ 1.7 centre to centre= 4.9 min., metal thickness= 0.81	Numerous circular openings provided.	
Others	None	--	
Supplementary information: Measured for metal enclosure.			

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Information technology equipment – Safety – Part 1: General requirements	
Differences according to.....:	EN 60950-1:2006/A11:2009/A1:2010/A12:2011
Attachment Form No.....:	EU_GD_IEC60950_1C_II
Attachment Originator	SGS Fimko Ltd
Master Attachment	Date 2011-08
Copyright © 2011 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.	

EN 60950-1:2006/A11:2009/A1:2010/A12:2011 – CENELEC COMMON MODIFICATIONS

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)					
Contents	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions				P
General	Delete all the “country” notes in the reference document (IEC 60950-1:2005) according to the following list: 1.4.8 Note 2 1.5.1 Note 2 & 3 1.5.7.1 Note 1.5.8 Note 2 1.5.9.4 Note 1.7.2.1 Note 4, 5 & 6 2.2.3 Note 2.2.4 Note 2.3.2 Note 2.3.2.1 Note 2 2.3.4 Note 2 2.6.3.3 Note 2 & 3 2.7.1 Note 2.10.3.2 Note 2 2.10.5.13 Note 3 3.2.1.1 Note 3.2.4 Note 3. 2.5.1 Note 2 4.3.6 Note 1 & 2 4.7 Note 4 4.7.2.2 Note 4.7.3.1 Note 2 5.1.7.1 Note 3 & 4 5.3.7 Note 1 6 Note 2 & 5 6.1.2.1 Note 2 6.1.2.2 Note 6.2.2 Note 6.2.2.1 Note 2 6.2.2.2 Note 7.1 Note 3 7.2 Note 7.3 Note 1 & 2 G.2.1 Note 2 Annex H Note 2				P
General (A1:2010)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list: 1.5.7.1 Note 6.1.2.1 Note 2 6.2.2.1 Note 2 EE.3 Note				P

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1.3.Z1	Add the following subclause: 1.3.Z1 Exposure to excessive sound pressure The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones. NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment", and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.	Added.	N/A
(A12:2011)	In EN 60950-1:2006/A12:2011 Delete the addition of 1.3.Z1 / EN 60950-1:2006 Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010	Deleted.	N/A
1.5.1	Add the following NOTE: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC	Added.	P
1.7.2.1 (A1:2010)	In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.	Added.	N/A
1.7.2.1 (A12:2011)	In EN 60950-1:2006/A12:2011 Delete NOTE Z1 and the addition for Portable Sound System. Add the following clause and annex to the existing standard and amendments.	Equipment is not a personal music player.	N/A
	Zx Protection against excessive sound pressure from personal music players		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Zx.1 General This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players. A personal music player is a portable equipment- for personal use, that: --is designed to allow the user to listen to recorded or broadcast sound or video; and --primarily uses headphones or earphones that can be worn in or on or around the ears; and --allows the user to walk around while in use. NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment. A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause. The requirements in this sub-clause are valid for music or video mode only. The requirements do not apply: --while the personal music player is connected to an external amplifier; or --while the headphones or earphones are not used. NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player. The requirements do not apply to: --hearing aid equipment and professional equipment; NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	--analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015. NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies. For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.		
	Zx.2 Equipment requirements No safety provision is required for equipment that complies with the following: --equipment provided as a package (personal music player with its listening device), where the acoustic output $L_{Aeq,T}$ is ≤ 85 dBA measured while playing the fixed "programme simulation noise" as described in EN 50332-1; and --a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" as described in EN 50332-1. NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level $L_{Aeq,T}$ is meant. See also Zx.5 and Annex Zx. All other equipment shall: a) protect the user from unintentional acoustic outputs exceeding those mentioned above; and b) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and NOTE 2 Examples of means include visual or audible signals. Action from the user is always required. NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off. d) have a warning as specified in Zx.3; and e) not exceed the following: 1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and 2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1. For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song. NOTE 4 Classical music typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.		

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Zx.3 Warning The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following: ---the symbol of Figure 1 with a minimum height of 5 mm; and ---the following wording, or similar: “To prevent possible hearing damage, do not listen at high volume levels for long periods.”  Figure 1 – Warning label (IEC 60417-6044) Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.		N/A
	Zx.4 Requirements for listening devices (headphones and earphones)		N/A
	Zx.4.1 Wired listening devices with analogue input With 94 dBA sound pressure output $L_{Aeq,T}$, the input voltage of the fixed “programme simulation noise” described in EN 50332-2 shall be ≥ 75 mV. This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control). NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Zx.4.2 Wired listening devices with digital input With any playing device playing the fixed “programme simulation noise” described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA. This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.). NOTE An example of a wired listening device with digital input is a USB headphone.		N/A
	Zx.4.3 Wireless listening devices In wireless mode: --with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and --respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and --with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA. NOTE An example of a wireless listening device is a Bluetooth headphone.		N/A
	Zx.5 Measurement methods Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s. NOTE Test method for wireless equipment provided without listening device should be defined.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	Replace the subclause as follows: Basic requirements To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;	Replaced.	P
	c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.		P
2.7.2	This subclause has been declared 'void'.		N/A
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.		N/A
3.2.5.1	Replace "60245 IEC 53" by "H05 RR-F"; "60227 IEC 52" by "H03 VV-F or H03 VVH2-F"; "60227 IEC 53" by "H05 VV-F or H05 VVH2-F2". In Table 3B, replace the first four lines by the following: Up to and including 6 0,75 ^{a)} Over 6 up to and including 10 (0,75) ^{b)} 1,0 Over 10 up to and including 16 (1,0) ^{c)} 1,5 In the conditions applicable to Table 3B delete the words "in some countries" in condition ^{a)} . In NOTE 1, applicable to Table 3B, delete the second sentence.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
3.3.4	In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following: Over 10 up to and including 16 1,5 to 2,5 1,5 to 4 Delete the fifth line: conductor sizes for 13 to 16 A		N/A
4.3.13.6 (A1:2010)	Replace the existing NOTE by the following: NOTE Z1 Attention is drawn to: 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and 2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).		N/A
	Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.		N/A
Annex H	Replace the last paragraph of this annex by: At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level. Replace the notes as follows: NOTE These values appear in Directive 96/29/Euratom. Delete NOTE 2.		N/A
Bibliography	Additional EN standards.		—

ZA	NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS	—
-----------	--	---

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.2.4.1	In Denmark , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.		N/A
1.2.13.14	In Norway and Sweden , for requirements see 1.7.2.1 and 7.3 of this annex.		N/A
1.5.7.1	In Finland, Norway and Sweden , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.8	In Norway , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).	Rated accordingly	P
1.5.9.4	In Finland, Norway and Sweden , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A
1.7.2.1	In Finland, Norway and Sweden, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows: In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt" In Sweden: "Apparaten skall anslutas till jordat uttag" In Norway and Sweden, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: "Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing – and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)."	Marking provided in Sweden language.	P

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	NOTE In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min. Translation to Norwegian (the Swedish text will also be accepted in Norway): “Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel- TV nettet.” Translation to Swedish: ”Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet.”		
1.7.5	In Denmark, socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a. For CLASS II EQUIPMENT the socket outlet shall be in accordance with Standard Sheet DKA 1-4a.		N/A
2.2.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.2	In Finland, Norway and Sweden there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.6.3.3	In the United Kingdom , the current rating of the circuit shall be taken as 13 A, not 16 A.		P
2.7.1	In the United Kingdom , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.5.13	In Finland, Norway and Sweden , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.		N/A
3.2.1.1	In Switzerland, supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets: SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998: SEV 5932-2.1998: Plug Type 25 , 3L+N+PE 230/400 V, 16 A SEV 5933-2.1998: Plug Type 21, L+N, 250 V, 16A SEV 5934-2.1998: Plug Type 23, L+N+PE 250 V,		N/A
3.2.1.1	In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	In Spain, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994. Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994. If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.		N/A
3.2.1.1	In the United Kingdom, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations. NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
3.2.1.1	In Ireland, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.		N/A
3.2.4	In Switzerland, for requirements see 3.2.1.1 of this annex.		N/A
3.2.5.1	In the United Kingdom, a power supply cord with conductor of 1,25 mm² is allowed for equipment with a rated current over 10 A and up to and including 13 A.		N/A
3.3.4	In the United Kingdom, the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: • 1,25 mm² to 1,5 mm² nominal cross-sectional area.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
4.3.6	In the United Kingdom , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A
4.3.6	In Ireland , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.		N/A
5.1.7.1	In Finland, Norway and Sweden TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment: • STATIONARY PLUGGABLE EQUIPMENT TYPE A that - is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and - has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and - is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.1 (A1:2010)	In Finland, Norway and Sweden, add the following text between the first and second paragraph of the compliance clause: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. Alternatively for components, there is no distance through insulation requirements for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV.		N/A
	It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b). It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2. A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions: - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 60384-14; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.2	In Finland, Norway and Sweden , the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N/A
7.2	In Finland, Norway and Sweden , for requirements see 6.1.2.1 and 6.1.2.2 of this annex. The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A
7.3	In Norway and Sweden , for requirements see 1.2.13.14 and 1.7.2.1 of this annex.		N/A
7.3	In Norway , for installation conditions see EN 60728-11:2005.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1 CANADA NATIONAL DIFFERENCES Information technology equipment – Safety – Part 1: General requirements			
Differences according to: CAN/CSA-C22.2 NO. 60950-1A-07			
Attachment Form No.: CA_ND_IEC60950_1C			
Attachment Originator: TÜV SÜD Product Service GmbH			
Master Attachment: Date (2012-08)			
Copyright © 2012 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			

	Special national conditions		P
1.1.1	All equipment is to be designed to allow installation in accordance with the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part I, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2.	In accordance with the National Electrical Code (NEC) and the Canadian Electrical Code (CEC) part 1 CAN/CSA C22.1, ANSI/NFPA 70, and unless marked or otherwise identified, the Standard for Electronic Computer/Data-Processing Equipment, ANSI/NFPA 75.	P
	Also, unless marked or otherwise identified, installation is allowed per the Standard for the Protection of Electronic Computer/Data-Processing Equipment, ANSI/NFPA 75.	Considered.	P
1.4.14	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.		P
1.5.5	For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the CEC/NEC.		N/A
	For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the CEC are required to have special construction features and identification markings.		N/A
1.7.1	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings.		N/A
	A voltage rating that exceeds an attachment plug cap rating is only permitted if it does not exceed the extreme operating conditions in Table 2 of CAN/CSA C22.2 No. 235, and		N/A
	- if it is part of a range that extends into the Table 2 "Normal Operating Conditions."		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	A voltage rating is not be lower than the specified "Normal Operating Conditions," unless it is part of a range that extends into the "Normal Operating Conditions."		N/A
1.7.7	Wiring terminals intended to supply Class 2 outputs in accordance with CEC Part 1 or NEC are marked with the voltage rating and "Class 2" or equivalent.		N/A
	- Marking is located adjacent to the terminals		N/A
	- Marking is visible during wiring		N/A
2.5	Fuse providing Class 2, Limited Power Source, or TNV current limiting is not operator-accessible unless it is not interchangeable.		P
2.6.3.3	Modify first column on Table 2D to "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."		P
2.7.1	Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is provided for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.		N/A
	Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, provided with special transformer overcurrent protection.		N/A
3.2	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains is in accordance with the NEC/CEC.		N/A
3.2.1	Attachment plugs of power supply cords are rated not less than 125 percent of the rated current of the equipment.		N/A
3.2.1.2	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment comply with special earthing, wiring, marking and installation instruction requirements.		N/A
3.2.3	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.		N/A
3.2.5	Power supply cords are no longer than 4.5 m in length.		N/A
	Minimum cord length is 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Flexible power supply cords are compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.		N/A
3.2.9	Permanently connected equipment have a suitable wiring compartment and wire bending space.		N/A
3.3	Wiring terminals and associated spacings for field wiring connections comply with CSA C22.2 No. 0.		N/A
3.3.3	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm ²).		N/A
3.3.4	Terminals for permanent wiring, including protective earthing terminals, are suitable for Canadian/US wire gauge sizes, are		N/A
	- rated 125 percent of the equipment rating, and		N/A
	- are specially marked when specified (1.7.7).		N/A
3.3.5	Revise first column of Table 3E to "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."		N/A
3.4.2	Motor control devices are provided for cord-connected equipment with a motor if the equipment is rated more than 12 A,		N/A
	- or if the motor has a nominal voltage rating greater than 120 V		N/A
	- or is rated more than 1/3 hp (locked rotor current over 43 A)		N/A
3.4.8	Vertically-mounted disconnect switches and circuit breakers have the "on" position indicated by the handle in the up position.		N/A
3.4.11	For computer room applications, equipment with battery systems capable of supplying 750 VA for five minutes have a battery disconnect means that may be connected to the computer room remote power-off circuit.		N/A
4.3.12	The maximum quantity of flammable liquid stored in equipment complies with NFPA 30.		N/A
4.3.13.5	Equipment with lasers meet the Canadian Radiation Emitting Devices Act, REDR C1370 and/or Code of Federal Regulations 21 CFR 1040, as applicable.		N/A
4.7	For computer room applications, automated information storage systems with combustible media greater than 0.76 m ³ (27 cu ft) have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.3.1	For computer room applications, enclosures with combustible material measuring greater than 0.9 m ² (10 sq ft) or a single dimension greater than 1.8 m (6 ft) have a flame spread rating of 50 or less.		N/A
	For other applications, enclosures with the same dimensions require a flame spread rating of 200 or less.		N/A
Annex H	Equipment that produces ionizing radiation comply with the Canadian Radiation Emitting Devices Act, REDR C1370 and/or Code of Federal Regulations, 21 CFR 1020, as applicable.		N/A
	Other National Differences		
1.5.1	Some components and materials associated with the risk of fire, electric shock, or personal injury have component or material ratings in accordance with the applicable national (Canadian and/or U.S.) component or material standard requirements.	Complied. Components are UL or CSA approved, see component list 1.5.1.	P
1.6.1.2	A circuit for connection to the DC Mains Supply is classified as either a SELV Circuit, TNV-2 Circuit or Hazardous Voltage Circuit depending on the maximum operating voltage of the supply.		N/A
	This maximum operating voltage includes consideration of the battery charging "float voltage" associated with the intended supply system, regardless of the marked power rating of the equipment.		N/A
2.3.1	For TNV-2 and TNV-3 circuits with other than ringing signals and with voltages exceeding 42.4 V _{peak} or 60 V _{d.c.} , the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.		N/A
2.3.2.1	In the event of a single fault between TNV and SELV circuits, the limits of 2.2.3 apply to SELV Circuits and accessible conductive parts.		N/A
2.6.3.4	Protective bonding conductors of non-standard protective bonding constructions (e.g., printed circuit traces) may be subjected to the additional limited short circuit test conditions specified.		N/A
4.2.8.1	Enclosures around CRTs with a face diameter of 160 mm or more reduce the risk of injury due to the implosion of the CRT.		N/A
4.3.2	Equipment with handles complies with special loading tests.	18.6 kg for each handle.	P
5.1.8.3	Equipment intended to receive telecommunication ringing signals comply with a special touch current measurement tests.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.3.7	Internal (e.g., card cage) SELV circuit connectors and printed wiring board connectors that are accessible to the operator and that deliver power are overloaded.	Refer to IEC 60950-1 test report	P
	During abnormal operating testing, if a circuit is interrupted by the opening of a component, the test shall be repeated twice (three tests total) using new components as necessary	Refer to IEC 60950-1 test report	P
6.4	Equipment intended for connection to telecommunication network outside plant cable is protected against overvoltage from power line crosses in accordance with 6.4 and Annex NAC.		N/A
Annex EE	Articulated accessibility probe (Fig EE.3) is used for assessing accessibility to document/media shredders instead of the Figure 2A test finger.		N/A
M.2	Continuous ringing signals up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.		N/A
Annex NAD	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear comply with special acoustic pressure requirements.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1 FINLAND NATIONAL DIFFERENCES Information technology equipment – Safety – Part 1: General requirements			
Differences according to: EN 60950-1:2006/A11:2009/A1:2010			
Attachment Form No.: FI_ND_IEC60950_1C			
Attachment Originator: SGS Fimko Ltd			
Master Attachment: Date (2010-04)			
Copyright © 2010 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			

	National Differences		P
General	See also Group Differences (EN 60950-1:2006/A11/A1)		P
1.5.7.1	In Finland resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.9.4	In Finland , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A
1.7.2.1	In Finland , CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in in Finland shall be as follows: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"		N/A
2.3.2	In Finland , there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.10.5.13	In Finland , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.7.1	In Finland, TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment: • STATIONARY PLUGGABLE EQUIPMENT TYPE A that - is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and - has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and - is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT.		N/A
6.1.2.1 (A1:2010)	In Finland, add the following text between the first and second paragraph of the compliance clause: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. Alternatively for components, there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b). It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2. A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions: - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14:2005 which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 60384-14:2005; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14:2005, in the sequence of tests as described in EN 60384-14:2005.		N/A
6.1.2.2	In Finland, the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N/A
7.2	In Finland, for requirements see 6.1.2.1 and 6.1.2.2 of this annex. The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A

National Differences to IEC 60950-1:2005 + A1:2009			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1
GERMANY NATIONAL DIFFERENCES

Information technology equipment – Safety –

Part 1: General requirements

Differences according to.....: VDE 0805-1:2011-01

Annex ZC, 1.7.2.1	According to GPSG, section 2, clause 4: If certain rules on the use, supplementation or maintenance of an item of technical work equipment or ready-to-use commodity must be observed in order to guarantee safety and health, instructions for use in German must be supplied when it is brought into circulation.		N/A
----------------------	--	--	-----

National Differences to IEC 60950-1:2005 + A1:2009			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1 ISRAEL NATIONAL DIFFERENCES

Information technology equipment – Safety –

Part 1: General requirements

Differences according to.....: SI 60950 Part 1

1.1.1	Replace the the text of Note 3 as follows: The requirements of Israel Standard SI 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment.		P
1.6	The clause is applicable with the following addition:		P
1.6.1	Add following note: In Israel, this clause is applicable subject to the Electricity Law, 1954, its regulations and revisions.		P
1.7	The clause is applicable with the following additions: Subclause 1.7.201 shall be added at the beginning of the clause as follows:		N/A
1.7.201	Marking in the Hebrew language The marking in the Hebrew language shall be in accordance with the Consumer Protection Order (Marking of goods), 1983. In addition to the marking required by clause 1.7.1, the following details shall be marked in the Hebrew language. The details shall be marked on the apparatus or on its package, or on a label properly attached to the apparatus or on the package, by bonding or sewing, in a manner that the label cannot be easily removed. 1. Name of the apparatus and its commercial designation; 2. Manufacturer's name and address. If the apparatus is imported, the importer's name and address; 3. Manufacturer's registered trademark, if any; 4. Name of the model and serial number, if any; 5. Country of manufacture.		N/A
1.7.2.1	The following shall be added to the clause: All the instructions and warnings related to safety shall also be written in the Hebrew language.		N/A
2	The clause is applicable with the following additions:		P

National Differences to IEC 60950-1:2005 + A1:2009			
Clause	Requirement + Test	Result - Remark	Verdict
2.9.4	The following shall be added at the beginning of the clause: In Israel, according to the Electricity Law, 1954, and the Electricity Regulations (Earthing and means of protection against electricity of voltages up to 1,000V) 1991, seven means of protection against electrocution are permitted, as follows: 1) TN-S - Network system earthing; TN-C-S - Network system earthing; 2) TT - Network system earthing; 3) IT - Network Insulation Terre; 4) Isolated transformer; 5) Safety extra low voltage (SELV or ELV); 6) Residual current circuit breaker (30 mA = IΔ); 7) Reinforced insulation; Double insulation (class II)		P
2.201	Prevention of electromagnetic interference - Prior to carrying out the tests in accordance with the clauses of this Standard, the compliance of the apparatus with the relevant requirements specified in the appropriate part of the Standard series, SI 961, shall be checked. <u>The apparatus shall meet the requirements in the appropriate part of the Standard series, SI 961.</u> - If there are components in the apparatus for the prevention of electromagnetic interference, these components shall not reduce the safety level of the apparatus as required by this Standard.		N/A
3	The clause is applicable with the following additions:		N/A
3.2.1.1	Connection to an a.c. mains supply After the note, the following note shall be added: Note: In Israel, the feed plug shall comply with the requirements of Israel Standard SI 32 Part 1.1.		N/A
3.2.1.2	Connection to a d.c. mains supply At the end of the first paragraph, the following note shall be added: Note: At the time of issue of this Standard, there is no Israel Standard for connection accessories to d.c.		N/A
Annex P	Normative references (List of relevant Israel Standards that have been inserted in place of some of the International Standards)		P

National Differences to IEC 60950-1:2005 + A1:2009			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1
KOREA NATIONAL DIFFERENCES

Information technology equipment – Safety –

Part 1: General requirements

Differences according to.....: K 60950-1

1.5.101	Plugs for the connection of the apparatus to the supply mains shall comply with the Korean requirement (KSC 8305)		N/A
8	EMC The apparatus shall comply with the relevant CISPR standards.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1 U.S.A. NATIONAL DIFFERENCES Information technology equipment – Safety – Part 1: General requirements			
Differences according to: UL 60950-1-07			
Attachment Form No.: US_ND_IEC60950_1C			
Attachment Originator: TÜV SÜD Product Service GmbH			
Master Attachment: Date (2012-08)			
Copyright © 2012 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			

	Special national conditions		P
1.1.1	All equipment is to be designed to allow installation in accordance with the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part I, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2.	In accordance with the National Electrical Code (NEC) and the Canadian Electrical Code (CEC) part 1 CAN/CSA C22.1, ANSI/NFPA 70, and unless marked or otherwise identified, the Standard for Electronic Computer/Data-Processing Equipment, ANSI/NFPA 75.	P
	Also, unless marked or otherwise identified, installation is allowed per the Standard for the Protection of Electronic Computer/Data-Processing Equipment, ANSI/NFPA 75.	Considered.	P
1.4.14	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.		P
1.5.5	For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the CEC/NEC.		N/A
	For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the CEC are required to have special construction features and identification markings.		N/A
1.7.1	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings.		N/A
	A voltage rating that exceeds an attachment plug cap rating is only permitted if it does not exceed the extreme operating conditions in Table 2 of CAN/CSA C22.2 No. 235, and		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	- if it is part of a range that extends into the Table 2 "Normal Operating Conditions."		N/A
	A voltage rating is not to be lower than the specified "Normal Operating Conditions," unless it is part of a range that extends into the "Normal Operating Conditions."		N/A
1.7.7	Wiring terminals intended to supply Class 2 outputs in accordance with CEC Part 1 or NEC are marked with the voltage rating and "Class 2" or equivalent.		N/A
	- Marking is located adjacent to the terminals		N/A
	- Marking is visible during wiring		N/A
2.5	Fuse providing Class 2, Limited Power Source, or TNV current limiting is not operator-accessible unless it is not interchangeable.		P
2.6.3.3	Modify first column on Table 2D to "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."		P
2.7.1	Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is provided for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.		N/A
	Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, provided with special transformer overcurrent protection.		N/A
3.2	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains is in accordance with the NEC/CEC.		N/A
3.2.1	Attachment plugs of power supply cords are rated not less than 125 per cent of the rated current of the equipment.		N/A
3.2.1.2	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment comply with special earthing, wiring, marking and installation instruction requirements.		N/A
3.2.3	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.		N/A
3.2.5	Power supply cords are no longer than 4.5 m in length.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Minimum cord length is 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement.		N/A
	Flexible power supply cords are compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.		N/A
3.2.9	Permanently connected equipment have a suitable wiring compartment and wire bending space.		N/A
3.3	Wiring terminals and associated spacings for field wiring connections comply with CSA C22.2 No. 0.		N/A
3.3.3	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm ²).		N/A
3.3.4	Terminals for permanent wiring, including protective earthing terminals, are suitable for Canadian/US wire gauge sizes, are		N/A
	- rated 125 per cent of the equipment rating, and		N/A
	- are specially marked when specified (1.7.7).		N/A
3.3.5	Revise first column of Table 3E to "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."		N/A
3.4.2	Motor control devices are provided for cord-connected equipment with a motor if the equipment is rated more than 12 A,		N/A
	- or if the motor has a nominal voltage rating greater than 120 V		N/A
	- or is rated more than 1/3 hp (locked rotor current over 43 A)		N/A
3.4.8	Vertically-mounted disconnect switches and circuit breakers have the "on" position indicated by the handle in the up position.		N/A
3.4.11	For computer room applications, equipment with battery systems capable of supplying 750 VA for five minutes have a battery disconnect means that may be connected to the computer room remote power-off circuit.		N/A
4.3.12	The maximum quantity of flammable liquid stored in equipment complies with NFPA 30.		N/A
4.3.13.5	Equipment with lasers meet the Canadian Radiation Emitting Devices Act, REDR C1370 and/or Code of Federal Regulations 21 CFR 1040, as applicable.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
4.7	For computer room applications, automated information storage systems with combustible media greater than 0.76 m ³ (27 cu ft) have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.		N/A
4.7.3.1	For computer room applications, enclosures with combustible material measuring greater than 0.9 m ² (10 sq ft) or a single dimension greater than 1.8 m (6 ft) have a flame spread rating of 50 or less.		N/A
	For other applications, enclosures with the same dimensions require a flame spread rating of 200 or less.		N/A
Annex H	Equipment that produces ionizing radiation complies with U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
	Other National Differences		
1.5.1	Some components and materials associated with the risk of fire, electric shock, or personal injury have component or material ratings in accordance with the applicable national (Canadian and/or U.S.) component or material standard requirements.	Complied. Components are UL or CSA approved, see component list 1.5.1.	P
1.6.1.2	A circuit for connection to the DC Mains Supply is classified as either a SELV Circuit, TNV-2 Circuit or Hazardous Voltage Circuit depending on the maximum operating voltage of the supply.		N/A
	This maximum operating voltage includes consideration of the battery charging "float voltage" associated with the intended supply system, regardless of the marked power rating of the equipment.		N/A
2.3.1	For TNV-2 and TNV-3 circuits with other than ringing signals and with voltages exceeding 42.4 V _{peak} or 60 V _{d.c.} , the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.		N/A
2.3.2.1	In the event of a single fault between TNV and SELV circuits, the limits of 2.2.3 apply to SELV Circuits and accessible conductive parts.		N/A
2.6.3.4	Protective bonding conductors of non-standard protective bonding constructions (e.g., printed circuit traces) may be subjected to the additional limited short circuit test conditions specified.		N/A

IEC60950_1C - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
4.2.8.1	Enclosures around CRTs with a face diameter of 160 mm or more reduce the risk of injury due to the implosion of the CRT.		N/A
4.3.2	Equipment with handles complies with special loading tests.	18.6 kg for each handle.	P
5.1.8.3	Equipment intended to receive telecommunication ringing signals comply with a special touch current measurement tests.		N/A
5.3.7	Internal (e.g., card cage) SELV circuit connectors and printed wiring board connectors that are accessible to the operator and that deliver power are overloaded.	Refer to IEC 60950-1 test report	P
	During abnormal operating testing, if a circuit is interrupted by the opening of a component, the test shall be repeated twice (three tests total) using new components as necessary	Refer to IEC 60950-1 test report	P
6.4	Equipment intended for connection to telecommunication network outside plant cable is protected against overvoltage from power line crosses in accordance with 6.4 and Annex NAC.		N/A
Annex EE	Articulated accessibility probe (Fig EE.3) is used for assessing accessibility to document/media shredders instead of the Figure 2A test finger.		N/A
Annex M.2	Continuous ringing signals up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.		N/A
Annex NAD	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear comply with special acoustic pressure requirements.		N/A

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1
AUSTRALIA and NEW ZEALAND NATIONAL DIFFERENCES
Information technology equipment – Safety –
Part 1: General requirements

Differences according to.....: AS/NZS 60950.1:2011

1.2	Insert the following between 'person, service' and 'range, rated frequency': POTENTIAL IGNITION SOURCE 1.2.12		N/A
1.2.12.201	Insert a new Clause 1.2.12.201 after Clause 1.2.12.15 as follows: 1.2.12.201 POTENTIAL IGNITION SOURCE Possible fault which can start a fire if the open-circuit voltage measured across an interruption or faulty contact exceeds a value of 50 V (peak) a.c. or d.c. and the product of the peak value of this voltage and the measured r.m.s. current under normal operating conditions exceeds 15 VA. Such a faulty contact or interruption in an electrical connection includes those which may occur in CONDUCTIVE PATTERNS on PRINTED BOARDS. NOTE 201 An electronic protection circuit may be used to prevent such a fault from becoming a POTENTIAL IGNITION SOURCE. NOTE 202 This definition is from AS/NZS 60065:2003.		N/A
1.5.1	1. Add the following to the end of the first paragraph: 'or the relevant Australian/New Zealand Standard.' 2. In NOTE 1, add the following after the word 'standard': 'or an Australian/New Zealand Standard'	Added.	P
1.5.2	Add the following to the end of the first and third dash items: 'or the relevant Australian/New Zealand Standard'	Added.	P

National Differences																				
Clause	Requirement + Test	Result - Remark	Verdict																	
3.2.5.1	Modify Table 3B as follows: 1. Delete the first four rows and replace with the following: <table><tr><th rowspan="2">RATED CURRENT of equipment A</th><th colspan="2">Minimum conductor sizes</th></tr><tr><th>Nominal cross-sectional area mm²</th><th>AWG or kcmil [cross-sectional area in mm²] see Note 2</th></tr><tr><td>Over 0.2 up to and including 3</td><td>0,5 ^a</td><td>18 [0,8]</td></tr><tr><td>Over 3 up to and including 7.5</td><td>0,75</td><td>16 [1,3]</td></tr><tr><td>Over 7.5 up to and including 10</td><td>(0,75) ^b 1,00</td><td>16 [1,3]</td></tr><tr><td>Over 10 up to and including 16</td><td>(1,0) ^c 1,5</td><td>14 [2]</td></tr></table> 2. Delete NOTE 1. 3. Delete Footnote ^a and replace with the following: ^a This nominal cross-sectional area is only allowed for Class II appliances if the length of the power supply cord, measured between the point where the cord, or cord guard, enters the appliance, and the entry to the plug does not exceed 2 m (0,5 mm² three-core supply flexible cords are not permitted; see AS/NZS 3191).	RATED CURRENT of equipment A	Minimum conductor sizes		Nominal cross-sectional area mm²	AWG or kcmil [cross-sectional area in mm²] see Note 2	Over 0.2 up to and including 3	0,5 ^a	18 [0,8]	Over 3 up to and including 7.5	0,75	16 [1,3]	Over 7.5 up to and including 10	(0,75) ^b 1,00	16 [1,3]	Over 10 up to and including 16	(1,0) ^c 1,5	14 [2]	Modified.	N/A
RATED CURRENT of equipment A	Minimum conductor sizes																			
	Nominal cross-sectional area mm²	AWG or kcmil [cross-sectional area in mm²] see Note 2																		
Over 0.2 up to and including 3	0,5 ^a	18 [0,8]																		
Over 3 up to and including 7.5	0,75	16 [1,3]																		
Over 7.5 up to and including 10	(0,75) ^b 1,00	16 [1,3]																		
Over 10 up to and including 16	(1,0) ^c 1,5	14 [2]																		
4.1.201	Insert a new Clause 4.1.201 after Clause 4.1 as follows: 4.1.201 Display devices used for television purposes Display devices which may be used for television purposes, with a mass of 7 kg or more, shall comply with the requirements for stability and mechanical hazards, including the additional stability requirements for television receivers, specified in AS/NZS 60065.		N/A																	
4.3.6	Delete the third paragraph and replace with the following: <i>Equipment with a plug portion, suitable for insertion into a 10 A 3-pin flatpin socket-outlet complying with AS/NZS 3112 shall comply with the requirements in AS/NZS 3112 for equipment with integral pins for insertion into socket-outlets.</i>	Deleted.	N/A																	
4.3.16.5	Add the following to the end of the first paragraph: 'or AS/NZS 2211.1'	Added.	N/A																	

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
4.7	Add the following new paragraph to the end of the clause: 'For alternate tests refer to Clause 4.7.201.'	Added.	N/A
4.7.201	Insert a new Clause 4.7.201 after Clause 4.7.3.6 as follows: 4.7.201 Resistance to fire – Alternative tests		N/A
4.7.201.1	4.7.201.1 General Parts of non-metallic material shall be resistant to ignition and spread of fire. This requirement does not apply to decorative trims, knobs and other parts unlikely to be ignited or to propagate flames from inside the apparatus, or the following: (a) Components that are contained in an enclosure having a flammability category of V-0 according to AS/NZS 60695.11.10 and having openings only for the connecting wires filling the openings completely, and for ventilation not exceeding 1mm in width regardless of length. (b) The following parts which would contribute negligible fuel to a fire: - small mechanical parts, the mass of which does not exceed 4g, such as mounting parts, gears, cams, belts and bearings; - small electrical components, such as capacitors with a volume not exceeding 1,750 mm³, integrated circuits, transistors and optocoupler packages, if these components are mounted on material of flammability category V-1, or better, according to AS/NZS 60695.11.10. NOTE In considering how to minimize propagation of fire and what 'small parts' are, account should be taken of the cumulative effect of small parts adjacent to each other for the possible effect of propagating the fire from one part to another. Compliance shall be checked by the tests of 4.7.201.2, 4.7.201.3, 4.7.201.4 and 4.7.201.5. For the base material of printed boards, compliance shall be checked by the test of 4.7.201.5. The tests shall be carried out on parts of non-metallic material which have been removed from the apparatus. When the glow-wire test is carried out, the parts shall be placed in the same orientation as they would be in normal use. These tests are not carried out on internal wiring.		N/A

National Differences									
Clause	Requirement + Test	Result - Remark	Verdict						
4.7.201.2	4.7.201.2 Testing of non-metallic materials Parts of non-metallic material shall be subject to the glow-wire test of AS/NZS 60695.2.11 which shall be carried out at 550 °C. Parts for which the glow-wire test cannot be carried out, such as those made of soft or foamy material, shall meet the requirements specified in ISO 9772 for category FH-3 material. The glow-wire test shall be not carried out on parts of material classified at least FH-3 according to ISO 9772 provided that the sample tested was not thicker than the relevant part.		N/A						
4.7.201.3	4.7.201.3 Testing of insulating materials Parts of insulating material supporting POTENTIAL IGNITION SOURCES shall be subject to the glow-wire test of AS/NZS 60695.2.11 which shall be carried out at 750 °C. The test shall be also carried out on other parts of insulating material which are within a distance of 3 mm of the connection. NOTE Contacts in components such as switch contacts are considered to be connections. For parts which withstand the glow-wire test but produce a flame, other parts above the connection within the envelope of a vertical cylinder having a diameter of 20 mm and a height of 50 mm shall be subjected to the needle-flame test. However, parts shielded by a barrier which meets the needle-flame test shall not be tested. The needle-flame test shall be made in accordance with AS/NZS 60695.11.5 with the following modifications: <table><tr><td>Clause of AS/NZS 60695.11.5</td><td>Change</td></tr><tr><td colspan="2">9 Test procedure</td></tr><tr><td>9.2 Application of needleflame</td><td> Replace the first paragraph with: The specimen shall be arranged so that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1. If possible the flame shall be applied at least 10 mm from a corner Replace the second paragraph with: The duration of </td></tr></table>	Clause of AS/NZS 60695.11.5	Change	9 Test procedure		9.2 Application of needleflame	Replace the first paragraph with: The specimen shall be arranged so that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1. If possible the flame shall be applied at least 10 mm from a corner Replace the second paragraph with: The duration of		N/A
Clause of AS/NZS 60695.11.5	Change								
9 Test procedure									
9.2 Application of needleflame	Replace the first paragraph with: The specimen shall be arranged so that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1. If possible the flame shall be applied at least 10 mm from a corner Replace the second paragraph with: The duration of								

National Differences			
Clause	Requirement + Test		Verdict
		application of the test flame shall be 30 s ± 1 s.	
	9.3 Number of test specimens	Replace with: The test shall be made on one specimen. If the specimen does not withstand the test, the test may be repeated on two further specimens, both of which shall withstand the test.	
	11 Evaluation of test results	Replace with: The duration of burning (t_b) shall not exceed 30 s. However, for printed circuit boards, it shall not exceed 15 s.	
	The needle-flame test shall not be carried out on parts of material classified as V-0 or V-1 according to AS/NZS 60695.11.10, provided that the sample tested was not thicker than the relevant part.		
4.7.201.4	4.7.201.4 Testing in the event of non-extinguishing material If parts, other than enclosures, do not withstand the glow wire tests of 4.7.201.3, by failure to extinguish within 30 s after the removal of the glowwire tip, the needle-flame test detailed in 4.7.201.3 shall be made on all parts of non-metallic material which are within a distance of 50 mm or which are likely to be impinged upon by flame during the tests of 4.7.201.3. Parts shielded by a separate barrier which meets the needle-flame test need not be tested. NOTE 1 If the enclosure does not withstand the glow-wire test the equipment is considered to have failed to meet the requirements of Clause 4.7.201 without the need for consequential testing. NOTE 2 If other parts do not withstand the glow-wire test due to ignition of the tissue paper and if this indicates that burning or glowing particles can fall onto an external surface underneath the equipment, the equipment is considered to have failed to meet the requirements of Clause 4.7.201 without the need for consequential testing. NOTE 3 Parts likely to be impinged upon by the flame are considered to be those within the envelope of a vertical cylinder having a radius of 10 mm and a height equal to the height of the flame, positioned above the point of the material supporting, in contact with, or in close proximity to, connections.		N/A
4.7.201.5	4.7.201.5 Testing of printed boards		N/A

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
	The base material of printed boards shall be subjected to the needle-flame test of Clause 4.7.201.3. The flame shall be applied to the edge of the board where the heat sink effect is lowest when the board is positioned as in normal use. The flame shall not be applied to an edge, consisting of broken perforations, unless the edge is less than 3 mm from a POTENTIAL IGNITION SOURCE. The test is not carried out if the — - Printed board does not carry any POTENTIAL IGNITION SOURCE; - Base material of printed boards, on which the available apparent power at a connection exceeds 15 VA operating at a voltage exceeding 50 V and equal or less than 400 V (peak) a.c. or d.c. under normal operating conditions, is of flammability category V-1 or better according to AS/NZS 60695.11.10, or the printed boards are protected by an enclosure meeting the flammability category V-0 according to AS/NZS 60695.11.10, or made of metal, having openings only for connecting wires which fill the openings completely; or - Base material of printed boards, on which the available apparatus power at a connection exceeds 15 VA operating at a voltage exceeding 400 V (peak) a.c. or d.c. under normal operating conditions, and base material of printed boards supporting spark gaps which provides protection against overvoltages, is of flammability category V-0 according to AS/NZS 60695.11.10 or the printed boards are contained in a metal enclosure, having openings only for connecting wires which fill the openings completely. Compliance shall be determined using the smallest thickness of the material. NOTE Available apparent power is the maximum apparent power which can be drawn from the supplying circuit through a resistive load whose value is chosen to maximise the apparent power for more than 2 min when the circuit supplied is disconnected.		
6.2.2	For Australia only, delete the first paragraph and Note, and replace with the following: In Australia only, compliance with 6.2.2 shall be checked by the tests of both 6.2.2.1 and 6.2.2.2.		N/A

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
6.2.2.1	For Australia only, delete the first paragraph including the Notes, and replace with the following: <i>In Australia only, the electrical separation is subjected to 10 impulses of alternating polarity, using the impulse test generator reference 1 of Table N.1. The interval between successive impulses is 60 s and the initial voltage, U_c, is:</i> <i>(i) for 6.2.1 a): 7.0 kV for hand-held telephones and for headsets and 2.5 kV for other equipment; and</i> <i>(ii) for 6.2.1 b) and 6.2.1 c): 1.5 kV.</i> NOTE 201 The 7 kV impulse simulates lightning surges on typical rural and semi-rural network lines. NOTE 202 The value of 2.5 kV for 6.2.1 a) was chosen to ensure the adequacy of the insulation concerned and does not necessarily simulate likely overvoltages.		N/A
6.2.2.2	For Australia only, delete the second paragraph including the Note, and replace with the following: <i>In Australia only, the a.c. test voltage is:</i> <i>(i) for 6.2.1 a): 3 kV; and</i> <i>(ii) for 6.2.1 b) and 6.2.1 c): 1.5 kV.</i> NOTE 201 Where there are capacitors across the insulation under test, it is recommended that d.c. test voltages are used. NOTE 202 The 3 kV and 1.5 kV values have been determined considering the low frequency induced voltages from the power supply distribution system.		N/A
7.3	Add the following before the first paragraph: Equipment providing functions that fall only within the scope of AS/NZS 60065 and that incorporate a PSTN interface, are not required to comply with this Clause where the only ports provided on the equipment, in addition to a coaxial cable connection and a PSTN interface, are audio or video ports and analogue or data ports not intended to be used for telecommunications purposes.		N/A
Annex P	Normative references (List of relevant Australia/New Zealand Standards that have been inserted in place of some of the International Standards)		N/A

J 60950-1 (H22)			
Clause	Requirement – Test	Result – Remark	Verdict

J 60950-1 (H22) : 2010 TEST REPORT

(Deviations from IEC 60950-1:2001, first edition)

Special National conditions, National deviation and other information according to MITI Ordinance No. 85.

Japanese unique deviations in J60950-1(H22):2010(=JIS C 6950-1:2009)

1.2.4.1	Add the following new notes. Note: Even if the equipment is designed as Class I, the equipment is regarded as Class 0I equipment when 2-pin adaptor with earthing lead wire or cord set having 2-pin plug with earthing lead wire is provided or recommended.	Added.	P
1.2.4.3A	Add the following new clause. 1.2.4.3A CLASS 0I EQUIPMENT Equipment having attachment plug without earthing blade, where protection against electric shock is achieved by: - using BASIC INSULATION, and - providing externally an earth terminal or a lead wire for earthing in order to connect those conductive parts that might assume a HAZARDOUS VOLTAGES in the event of BASIC INSULATION fault to the PROTECTIVE EARTHING CONDUCTOR in the building wiring. NOTE – Class 0I equipment may have a part constructed with Double Insulation or Reinforced Insulation circuit.	Added.	P
1.3.2	Add the following notes after first paragraph: Note 1 Transportable or similar equipment that are relocated frequently for intended usage should not be designed as Class I or Class 0I equipment unless it is intended to be installed by service personnel. Note 2 Considering wiring circumstance in Japan, equipment intended to be installed where the provision for earthing connection is unlikely should not be designed as Class I or Class 0I equipment unless it is intended to be installed by service personnel.	Added.	P

J 60950-1 (H22)			
Clause	Requirement – Test	Result – Remark	Verdict
1.5.1	Replace the first paragraph with the follows: Where safety is involved, components shall comply either with the requirements of this standard, with the safety aspects of the relevant JIS component standard, or IEC component standards in case there is no applicable JIS component standard is available. However, a component that falls within the scope of METI Ministerial ordinance No. 85 is properly used in accordance with its marked ratings, requirements of 1.5.4, 2.8.7 and 3.2.5 apply, and in addition, a cord connector of power supply cord set mating with appliance inlet complying with the standard sheet of IEC 60320-1, shall comply with relevant standard sheet of IEC 60320-1. Replace Note 1 with the following: Note 1 A JIS or an IEC component standard is considered relevant only if the component in question clearly falls within its scope.	Added.	N/A
1.5.2	Replace first sentence in the first dashed paragraph with the following: - a component that has been demonstrated to comply with a JIS component standard harmonized with the relevant IEC component standard, or where such JIS component standard is not available, a component that has been demonstrated to comply with the relevant IEC component standard shall be checked for correct application and use in accordance with its rating. Add a note after the first dashed paragraph as follows: Note 1 See 1.7.5A when Type C.14 appliance coupler rated 10 A per IEC 60320-1 is used with an equipment rated not more than 125 V and rated more than 10 A. Replace first sentence in the third dashed paragraph as follows: - where no relevant IEC component standard or JIS component standard harmonized with the relevant IEC component standard exists, or where components are used in circuits not in accordance with their specified rating, the components shall be tested under the conditions occurring in the equipment.	Added.	N/A

J 60950-1 (H22)			
Clause	Requirement – Test	Result – Remark	Verdict
1.7.1	Replace fifth dashed paragraph with the following: - manufacturer's or responsible company's name or trade-mark or identification mark;	Added.	N/A
1.7.5A	Add the following new clause. after 1.7.5 1.7.5A Appliance Coupler If appliance coupler according to IEC60320-1, C.14(rated current: 10A)is used in equipment whose rated voltage is less than 125V and rated current is over 10A, the following instruction or equivalent shall be described in the user instruction. “ Use only designated cord set attached in this equipment”	Added.	N/A
1.7.12	Replace first sentence with the following: Instructions and equipment marking related to safety shall be in Japanese.	Replaced.	N/A
1.7.17A	Add the following new clause. after 1.7.17 1.7.17A Marking for CLASS 0I EQUIPMENT For CLASS 0I EQUIPMENT, the following instruction shall be marked on the visible place of the mains plug or the main body: “Provide an earthing connection” Moreover, for CLASS 0I EQUIPMENT, the following or equivalent instruction shall be indicated on the visible place of the main body or written in the operating instructions: “Provide an earthing connection before the mains plug is connected to the mains. And, when disconnecting the earthing connection, be sure to disconnect after pulling out the mains plug from the mains.”	Added.	N/A
2.6.3.2	Add the following after 1st paragraph. This also applies to the conductor of lead wire for protective earthing of CLASS 0I EQUIPMENT.	Added.	P
2.6.4.2	Replace 1st paragraph with the following. Equipment required to have protective earthing shall have a main protective earthing terminal. For equipment with a DETACHABLE POWER SUPPLY CORD, the earthing terminal in the appliance inlet is regarded as the main protective earthing terminal except for CLASS 0I EQUIPMENT providing separate main protective earthing terminal other than appliance inlet.	Added.	P

J 60950-1 (H22)			
Clause	Requirement – Test	Result – Remark	Verdict
2.6.5.4	Replace 1st sentence with the following. Protective earthing connections of CLASS I EQUIPMENT shall make earlier and break later than the supply connections in each of the following:	Added.	P
2.6.5.8A	Add the following new clause. after 2.6.5.8A 2.6.5.8A Earthing of CLASS 0I EQUIPMENT Plugs with a lead wire for earthing shall not be used for equipment having a rated voltage exceeding 150V. For plugs with a lead wire for earthing, the lead wire shall not be earthed by a clip. CLASS 0I EQUIPMENT shall be provided with an earthing terminal or lead wire for earthing in the external location where easily visible.	Added.	N/A
3.2.3	Add the following after Table 3A: Table 3A applies when cables complying JIS C 3662 or JIS C 3663 are used. In case of other cables, cable entries shall be so designed that a conduit suitable for the cable used can be fitted.	Added.	N/A
3.2.5.1	Add the following to the last of first dashed paragraph. Or mains cords shall be of the sheathed type complying with Appendix 1 of Article 1 of the Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance. Add the following to the last of second dashed paragraph. Or mains cords shall be of the sheathed type complying with Appendix 1 of Article 1 of the Ministerial Ordinance on stipulating technical requirements for the Electrical Appliance.. Delete 1) in Table 3B.	Added.	N/A
3.3.4	Add the following note to Table 3D: Note For cables other than those complying with JIS C 3662 or JIS C 3663, terminals shall be suitable for the size of the intended cables.	Added.	N/A
3.3.7	Add the following after the first sentence: This requirement is not applicable to the external earthing terminal of Class 0I equipment.	Added.	N/A
4.3.4	Add the following after the first sentence: This requirement also applies to those connections in Class 0I equipment, where CLEARANCE or CREEPAGE DISTANCES over BASIC INSULATION would be reduced to less than the values specified in 2.10.	Added.	N/A

J 60950-1 (H22)																															
Clause	Requirement – Test	Result – Remark	Verdict																												
5.1.3	Add a note after the first paragraph as follows: Note – Attention should be drawn to that majority of three-phase power system in Japan is of delta connection, and therefore, in that case, test is conducted using the test circuit from IEC 60990, figure 13.	Added.	N/A																												
5.1.6	Replace Table 5A. as follows	Replaced. The equipment is "Protection Class 0I".	P																												
	<table><tr><th>Type of equipment</th><th>Terminal A of measuring instrument connected to:</th><th>Maximum TOUCH CURRENT mA r.m.s. 1)</th><th>Maximum PROTECTIVE CONDUCTOR CURRENT</th></tr><tr><td>ALL equipment</td><td>ALL equipment Accessible parts and circuits not connected to protective earth</td><td>0,25</td><td>-</td></tr><tr><td>HAND-HELD</td><td rowspan="5">Equipment main protective earthing terminal (if any) CLASS I EQUIPMENT</td><td>0,75</td><td>-</td></tr><tr><td>MOVABLE (other than HAND_HELD, but including TRANSPORTABLE EQUIPMENT</td><td>3,5</td><td>-</td></tr><tr><td>STATIONARY, PLUGGABLE TYPE A</td><td>3,5</td><td>-</td></tr><tr><td>ALL other STATIONARY EQUIPMENT - not subject to the conditions of 5.1.7 - subject to the conditions of 5.1.7</td><td>3.5 -</td><td>- 5 % of input current</td></tr><tr><td>HAND-HELD</td><td rowspan="2">Equipment main protective earthing terminal (if any) CLASS 0I EQUIPMENT</td><td>0,5</td><td>-</td></tr><tr><td>Others</td><td>1.0</td><td>-</td></tr></table> 1) If peak values of TOUCH-CURRENT are measured, the maximum values obtained by multiplying the r.m.s. values by 1,414.			Type of equipment	Terminal A of measuring instrument connected to:	Maximum TOUCH CURRENT mA r.m.s. 1)	Maximum PROTECTIVE CONDUCTOR CURRENT	ALL equipment	ALL equipment Accessible parts and circuits not connected to protective earth	0,25	-	HAND-HELD	Equipment main protective earthing terminal (if any) CLASS I EQUIPMENT	0,75	-	MOVABLE (other than HAND_HELD, but including TRANSPORTABLE EQUIPMENT	3,5	-	STATIONARY, PLUGGABLE TYPE A	3,5	-	ALL other STATIONARY EQUIPMENT - not subject to the conditions of 5.1.7 - subject to the conditions of 5.1.7	3.5 -	- 5 % of input current	HAND-HELD	Equipment main protective earthing terminal (if any) CLASS 0I EQUIPMENT	0,5	-	Others	1.0	-
Type of equipment	Terminal A of measuring instrument connected to:	Maximum TOUCH CURRENT mA r.m.s. 1)	Maximum PROTECTIVE CONDUCTOR CURRENT																												
ALL equipment	ALL equipment Accessible parts and circuits not connected to protective earth	0,25	-																												
HAND-HELD	Equipment main protective earthing terminal (if any) CLASS I EQUIPMENT	0,75	-																												
MOVABLE (other than HAND_HELD, but including TRANSPORTABLE EQUIPMENT		3,5	-																												
STATIONARY, PLUGGABLE TYPE A		3,5	-																												
ALL other STATIONARY EQUIPMENT - not subject to the conditions of 5.1.7 - subject to the conditions of 5.1.7		3.5 -	- 5 % of input current																												
HAND-HELD		Equipment main protective earthing terminal (if any) CLASS 0I EQUIPMENT	0,5	-																											
Others	1.0		-																												

J 60950-1 (H22)			
Clause	Requirement – Test	Result – Remark	Verdict
7.2	Add the following after the paragraph: However, the separation requirements and tests of 6.2.1 a), b) and c) do not apply to a CABLE DISTRIBUTION SYSTEM if all of the following apply: – the circuit under consideration is a TNV-1 CIRCUIT; and – the common or earthed side of the circuit is connected to the screen of the coaxial cable and to all accessible parts and circuits (SELV, accessible metal parts and LIMITED CURRENT CIRCUITS, if any); and – the screen of the coaxial cable is intended to be connected to earth in the building installation	Added.	N/A
W.1	Replace second and third sentence in the first paragraph with the following: This distinction between earthed and unearthed (floating) circuit is not the same as between CLASS I EQUIPMENT, CLASS 0I EQUIPMENT and CLASS II EQUIPMENT. Floating circuits can exist in CLASS I EQUIPMENT or CLASS 0I EQUIPMENT and earthed circuits in CLASS II EQUIPMENT.	Added.	P

J 60950-1 (H22)			
Clause	Requirement – Test	Result – Remark	Verdict
Annex JA	Add a new annex JA with the following contents. Annex JA (normative) Document shredding machines Document shredding machines shall also comply with the requirements of this annex except those of STATIONARY EQUIPMENT used by connecting directly to an AC MAINS SUPPLY of three-phase 200V or more.	Added. Not Document shredding machines.	N/A
JA.1	Markings and instructions The symbol  (JIS S 0101:2000, 6.2.4) and the following precautions for use shall be marked on readily visible part adjacent to document feed opening. The marking shall be clearly legible, permanent, and easily discernible; - that use by an infants/children may cause a hazard of injury etc.; - that a hand can be drawn into the mechanical section for shredding when touching the document-slot; - that clothing can be drawn into the mechanical section for shredding when touching the document-slot; - that hairs can be drawn into the mechanical section for shredding when touching the document-slot; - in case of equipment incorporating a commutator motor, that equipment may catch fire or explode by spraying of flammable gas.	Added. Not Document shredding machines.	N/A
JA.2	Inadvertent reactivation Any safety interlock that can be operated by means of the test finger, Figure JA.1, is considered to be likely to cause inadvertent reactivation of the hazard. Compliance is checked by inspection and, where necessary, by a test with the test finger, Figure JA.1	Added. Not Document shredding machines.	N/A

J 60950-1 (H22)			
Clause	Requirement – Test	Result – Remark	Verdict
JA.3	Disconnection from the mains supply Document shredding machines shall incorporate an isolating switch complying with sub-clause 3.4.2 as the device disconnecting the power of hazardous moving parts. For this switch, two-position (single-use) switch or multi-position (multifunction) switch (e.g., slide switch) may be used. If two-position switch, the positions for “ON” and “OFF” shall be indicated in accordance with sub-clause 1.7.8. If multi-position switch, the position for “OFF” shall be indicated in accordance with sub-clause 1.7.8 and other positions shall be indicated with proper terms or symbols. Compliance is checked by inspection.	Added. Not Document shredding machines.	N/A
JA.4	Protection against hazardous moving parts Any warning shall not be used instead of the structure for preventing access to hazardous moving parts. Document shredding machines shall comply with the following requirements. Insert the test finger, Figure JA.1, into all openings in MECHANICAL ENCLOSURES without applying appreciable force. It shall not be possible to touch hazardous moving parts with the test finger. This consideration applies to all sides of MECHANICAL ENCLOSURES when the equipment is mounted as intended . Before testing with the test finger, remove the parts detachable without a tool. Insert the wedge-probe, Figure JA.2, into the document-slot. And, against all directions of openings, if straight-cutting type, a force of 45 N shall apply to the probe, and 90 N if cross-cutting type. In this case, the weight of the probe is to be factored into the overall applied force. Before testing with the wedge-probe, remove the parts detachable without a tool. It shall not be possible to touch any hazardous moving parts, including the shredding roller or the mechanical section for shedding, with the probe.	Added. Not Document shredding machines.	N/A

J 60950-1 (H22)			
Clause	Requirement – Test	Result – Remark	Verdict


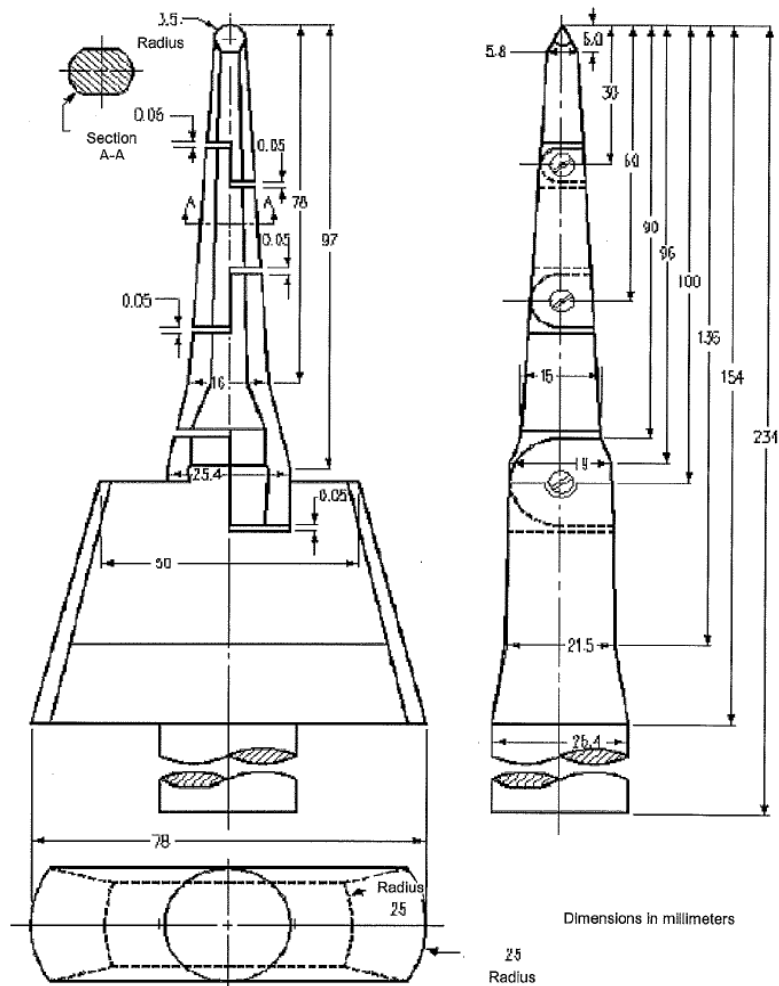


Figure JA.1 Test finger

J 60950-1 (H22)

Clause	Requirement – Test	Result – Remark	Verdict
--------	--------------------	-----------------	---------

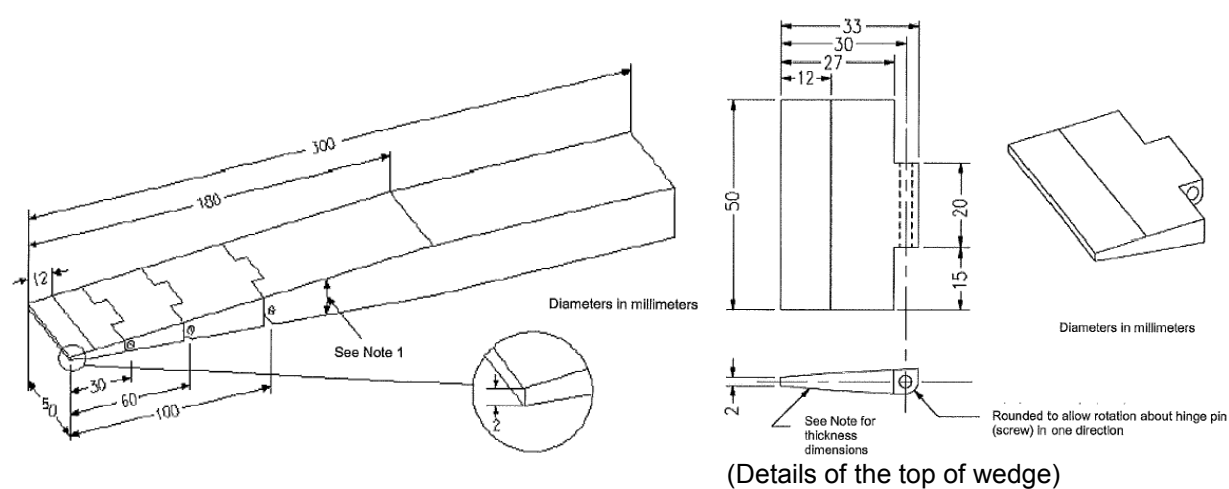

Distance from the top	Thickness of probe
0	2
12	4
180	24

Note 1 - The thickness of the probe varies linearly, with slope changes at the respective

points shown in the table.

Note 2 –The allowable dimensional tolerance of the probe is +/- 0.127 mm.

Figure JA.2 Wedge-probe

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
Appendix	J3000 (H21) Special National conditions, National deviation and other information according to MITI Ordinance No. 85.		—
1	General requirement When equipment provides with appliance inlet complying with JIS-C 8283-1(2008), soldered parts of appliance inlet is not applied by force during insert or removal of connector. This is not applied when inlet body is fixed itself and not fixed by solder.	Inlet is fixed by adequate mechanical construction, not rely on soldering.	P
2	Requirement for equipment		—
2.1	Electric heater When diode is used in parallel for adjustment of power, the equipment shall remain safe for operation under open condition of one diode.	Not electric stove.	N/A
	The current rating of one diode shall be more than main current. The diodes connected in parallel are same type.		N/A
	The heating test specified by clause 11 of JIS C 9335-2-30(2006) under open condition of one diode shall comply with the requirements.		N/A
2.2	Electric heater with glowing heating elements	Not electric stove.	N/A
	Surface treatment by paint or adhesive on protective frame or protective mesh shall not be used.		N/A
	Caution marking like below shall be on - easily visible place of the equipment or - Instruction manual 「注意 当該機器から、使用初期段階で揮発性有機化合物およびカルボニル化合物が最も放散するおそれがあるため、その際には十分換気を行うこと。」		N/A
3	Components used in equipment	No relevant equipment or component.	N/A
3.1	Motor capacitors used in air conditioner, electric washing machine, refrigerator or electric freezer shall be comply with - capacitors with protective elements or protective mechanism complying with JIS C 4908(2007) - P2 capacitor complying with IEC 60252-1(2001) Capacitor complying with below is acceptable		N/A
	Enclosed by metal or ceramic		N/A
	No non-metallic materials within 50 mm from capacitor surface		N/A

J3000 (H21):2009

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
	Non-metallic material within 50 mm from capacitor surface comply with needle frame test of JIS C 9335-1(2003), Annex E		N/A
	Non-metallic material within 50 mm from capacitor surface comply with V-1 test of JIS C 60965-11-10(2006).		N/A
3.2	Plug directly inserted to outlet used refrigerator or electric freezer. Shall comply with - Face contact with outlet shall have CTI with more than 400 according to JIS C 2134(2007) or - Supporting material of blades shall comply with glow wire test by temperature of 750°C according to JIS C 60695-2-11(2004) or JIS C 60695-2-12(2004). Materials having glow wire frame temperature of 775 °C are acceptable.		N/A

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
APPENDIX	Ukrainian National Differences according to CB Bulletin No. 110A, June 2006 (IEC Publication 60950:1999)		P
EXPLANATION FOR ABBREVIATIONS P=Pass, F=Fail, N/A=Not applicable. Placed in the column to the right.			
1.4.5	In Ukraine the NOMINAL VOLTAGE is 220 V for monophase or 380 V for three-phase supply.		N/A
1.5.8	In Ukraine components connected between phase and earthing or between phase and neutral terminal shall be calculated for the voltage between phases.		N/A
1.7.2	In Ukraine for the APPARATUS of CLASS I the necessity of its obligatory earthing shall be indicated in the manuals.		N/A
2.3.3	In Ukraine method b) is not used.		N/A
6.2.2	In Ukraine the both tests in 6.2.2.1 and 6.2.2.2 are applied.		N/A
6.2.2.1	In Ukraine in 6.2.1 a) is used Uc=3.5 kV.		N/A
6.2.2.2	In Ukraine in 6.2.1 a) is used 3.0 kV for telephones and headsets and 2.5 kV for other equipment and in 6.2.1 b) and c) is used 1.5 kV.		N/A
Annex N	In Ukraine in 6.2.1 a) is used 3.0 kV for telephones and headsets and 2.5 kV for other equipment and in 6.2.1 b) and c) is used 1.5 kV.		N/A

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1
CHINA NATIONAL DIFFERENCES

Information technology equipment – Safety –

Part 1: General requirements

Differences according to.....: GB4943.1-2011

1.1.2	GB 4943.1-2011 applies to equipment for use at altitudes not exceeding 5000m above sea level, primarily in regions with moderate or tropical climates. Amend the third dashed paragraph of 1.1.2 as: — — equipment intended to be used in vehicles, on board ships or aircraft, at altitudes greater than 5000m;		P
1.4.5	After the third paragraph, add a paragraph: If the equipment is intended for direct connection to an AC mains supply, the tolerances on RATED VOLTAGE shall be taken as +10%,-10% unless a wider tolerance is declared by the manufacturer. The first dash paragraph "-the RATED VOLTAGE is 230V single -phase or 400V three-phase, in which case the tolerance shall be taken as +10% and -10%" of IEC 60950-1:2005 is deleted in GB 4943.1-2011		P
1.4.12.1	Tma in clause 1.4.12.1 amended as: Tma: is the maximum ambient temperature permitted by the manufacturer's specification, or 35 °C, whichever is greater. Add note 1: For equipment not to be operated at tropical climatic conditions, Tma: is the maximum ambient temperature permitted by the manufacturer's specification, or 25 °C, whichever is greater. Add note 2: For equipment is to be operated at 2000m-5000m above sea leave, its temperature test conditions and temperature limits are under consideration.		P
1.5. 2	Add a note behind the first break off section in Clause 1.5.2: A component used shall comply with related requirements corresponding altitude of 5000m.		P
1.7	Add one paragraph before the last paragraph: The required marking and instruction should be given in normative Chinese unless otherwise specified.		N/A

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.1	Based on the AC mains supply of China, the RATED VOLTAGE should be 220V (single phase) or 380V (three-phases) for single rated voltage, for RATED VOLTAGE RANGE, it should cover 220V or 380V (three-phases), for multiple RATED VOLTAGES, one of them should be 220V or 380V (three-phases) and set on 220V or 380V (three-phases) when manufactured. And the RATED FREQUENCY or RATED FREQUENCY RANGE should be 50Hz or include 50Hz.		P
1.7.2.1	Add requirements of warning for equipment intended to be used at altitudes not exceeding 2000m or at non-tropical climate regions: For equipment intended to be used at altitude not exceeding 2000m, a warning label containing the following or a similar appropriate wording, or a symbol as in annex DD shall fixed to the equipment at readily visible place. "Only used at altitude not exceeding 2000m."  For equipment intended to be used in not-tropical climate regions, a warning label containing the following or a similar appropriate wording, or a symbol as in annex DD shall fixed to the equipment at readily visible place. "Only used in not-tropical climate regions."  If only the symbol used, the explanation of the symbol shall be contained in the instruction manual. The above statements shall be given in a language acceptable to the regions where the apparatus is intended to be used.		N/A

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	Amended the first paragraph as: Protection in PRIMARY CIRCUITS against overcurrent short-circuits and earth faults shall be provided as an integral part of the equipment except special provisions. And the protective device shall meet the requirement of Clause 5.3. Delete note of Clause 2.7.1.		P
2.9.2	First section of Clause 2.9.2 amended as two sections: Where required by 2.9.1, 2.10.8.3, 2.10.10 or 2.10.11, humidity conditioning is conducted for 120 h in a cabinet or room containing air with ambient temperature $40\pm 2^{\circ}\text{C}$ and a relative humidity of $(93\pm 3)\%$. During this conditioning the component or subassembly is not energized. For equipment not to be operated at tropical climatic conditions, Where required by 2.9.1, 2.10.8.3, 2.10.10 or 2.10.11, humidity conditioning is conducted for 48 h in a cabinet or room containing air with a relative humidity of $(93\pm 3)\%$. The temperature of the air, at all places where samples can be located, is maintained within 2°C of any convenient value between 20°C and 30°C such that condensation does not occur. Due to pretreatment of equipment operated at high altitude area is humidity conditioning withstand hot shock, specific requirements are to be considered. Add note: For equipment to be operated at 2000 m - 5000m above sea level, assessment and requirement of humidity conditioning for Insulation material properties are considered.		P

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.3.1	Amend the third paragraph of Clause 2.10.3.1 to be: These requirements apply for equipment to be operated up to 2000 m above sea level. For equipment to be operated at more than 2000 m above sea level and up to 5000m above sea level, the minimum CLEARANCE shall be multiplied by the factor 1.48 corresponding altitude of 5000m given in Table A.2 of IEC 60664-1. For equipment to be operated at more than 5000 m above sea level, the minimum CLEARANCE shall be multiplied by the factor given in Table A.2 of IEC 60664-1. Linear interpolation is permitted between the nearest two points in Table A.2. The calculated minimum CLEARANCE using this multiplication factor shall be rounded up to the next higher 0,1 mm increment.		P
2.10.3.3&2.10.3.4	Add "(applicable for altitude up to 2000m)" in header of Table 2K、2L and 2M.		P
2.10.3.4	Add a new section above Table 2K and in Clause 2.10.3.4: Minimum CLEARANCES determined by above rules apply for equipment to be operated up to 2000m above sea level. For equipment to be operated at 2000 m - 5000m above sea level, the minimum CLEARANCE shall be multiplied by the factor 1.48 corresponding altitude of 5000m given in Table A.2 of GB/T16935.1 (IEC 60664-1). For equipment to be operated at more than 5000 m above sea level, the minimum CLEARANCE shall be multiplied by the factor given in Table A.2 of GB/T16935.1.		P
3.2.1.1	Add a paragraph before the last paragraph: Plugs connected to AC mains supply shall comply with GB 1002 or GB 1003 or GB/T 11918 as applicable.		N/A
4.2.8	Clause 4.2.8 cathode ray tubes quoted Clause 18 of GB8898-2011. Delete note of Clause 4.2.8.		N/A

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
Annex E	Last section of Annex E amended as: For comparison of winding temperatures determined by the resistance method of this annex with the temperature limits of Table 4B, 35 °C shall be added to the calculated temperature rise. And add note: for equipment not to be operated at tropical climatic conditions, 25 °C shall be added to the calculated temperature rise to compare with the temperature of Table 4B.		N/A
Annex G.6	Change the second section of Clause G.6 to be: For equipment to be operated at 2000 m - 5000m above sea level, the minimum CLEARANCE shall be multiplied by the factor 1.48 corresponding altitude of 5000m given in Table A.2 of GB/T16935.1. For equipment to be operated at more than 5000 m above sea level, the minimum CLEARANCE shall be multiplied by the factor given in Table A.2 of IEC 60664-1. Linear interpolation is permitted between the nearest two points in Table A.2. The calculated minimum CLEARANCE using this multiplication factor shall be rounded up to the next higher 0,1 mm increment.		P
Annex BB (informative)	Amended as : The differences between Chinese national standards GB 4943.1-2011 and GB 4943-2001.		P

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DD (normative)	Added annex DD: Instructions for the new safety warning labels. DD.1 Altitude warning label  Meaning of the label: Evaluation for apparatus only based on altitude not exceeding 2000m, therefor it's the only operating condition applied for the equipment .There may be some potential safety hazard if the equipment is used at altitude above 2000m . DD.2 Climate warning label  Meaning of the label: Evaluation for apparatus only based on temperate climate condition, therefor it's the only operating condition applied for the equipment .There may be some potential safety hazard if the equipment is used in tropical climate region.		N/A
Annex EE (informative)	Added annex EE: Illustration relative to safety explanation in normative Chinese, Tibetan, Mongolian, Zhuang Language and Uighu.		N/A
Other amend-ments	In accordance with the relevant CTL decisions and the amendments of IEC 60950-1, the specific requirements or mistakes in IEC standard are corrected or editorially modified in this part, Including clause 1.7, 2.1.1.7, 2.9.2, Table 2H, Figure 2H, F.8, F.9, M.3 and Annex U.		P
Quoting standards and reference documents	The principles of quoting and referring to other standards in Annex P and reference documents of IEC 60950-1 are as follows: If the date of the reference document is given, only that edition applies, excluding any subsequent corrigenda and amendments. However, parties to agreements based on this part are encouraged to investigate the possibility of applying the most recent editions of the reference documents. For undated references, the latest edition of the referenced document applies, including any corrigenda and amendments.		P

National Differences			
Clause	Requirement + Test	Result - Remark	Verdict
	For the usage of international standards in Chinese national standards and industry standards is various, in the aim of achieving easy operation and based on the requirements of GB/T 1.1 and GB/T 20000.2, when quoting an entire international standard in the normative quoting files and reference documents of Annex P of this part, the principles of quotation are as follows: - If there is no national standard or industry standard corresponding to the international standard, then the international standard is quoted; - If there is national standard or industry standard corresponding to the international standard, then either the national or industry standard is quoted; - If the date of the national standard or industry standard is not given, the latest edition of the standard applies; - The national standard or industry standard number, corresponding international standard number and the consistency level code should be identified in parentheses behind the listed national standard or industry standard. When quoting several chapters or clauses of the international standard, the principles of quotation are as follows: - If there is no national standard or industry standard corresponding to the international standard, then the international standard is quoted; - If there is national standard or industry standard corresponding to the international standard, then either the national or industry standard is quoted. Meanwhile, in order to retain the relevant information on international standards, informative annex CC is increased, which gives the table about the comparison of the normative quoting files and reference documents in IEC 60950-1: 2005 and GB 4943.1-2011.		